

Cavity BPM Designs, Related Electronics and Measured Performances



Dirk Lipka
MDI, DESY Hamburg



Outline

- Principle
- Brief history
- Filter monopole mode
- Influence of beam angle and bunch tilt
- Examples:
 - SPring-8
 - DESY
 - SACLAY: Reentrant
 - Fermilab
 - LCLS
 - ILC spectrometer
 - ILC interaction point
- Summary

Basic Principle


Electric Field of a charged Bunch

Resonator

Tube


Type	E-Field
Monitor	e-field (t=0..end(0.01)) [pic]
Maximum-3d	754805 V/m at 0 / 1.66667 / -1.47728
Sample	50 / 1000
Time	0.49

- Resonator can be produced with high accuracy
- With antenna: Measured voltages can be used to characterize beam with high resolution
- Non destructive Monitor

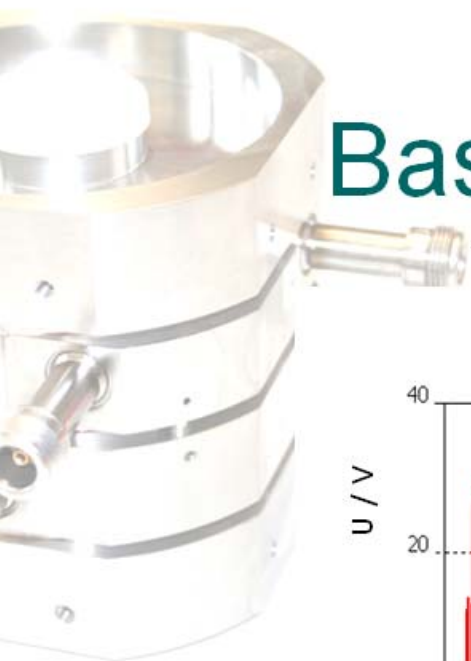

Basic Principle

Voltage vs. Time

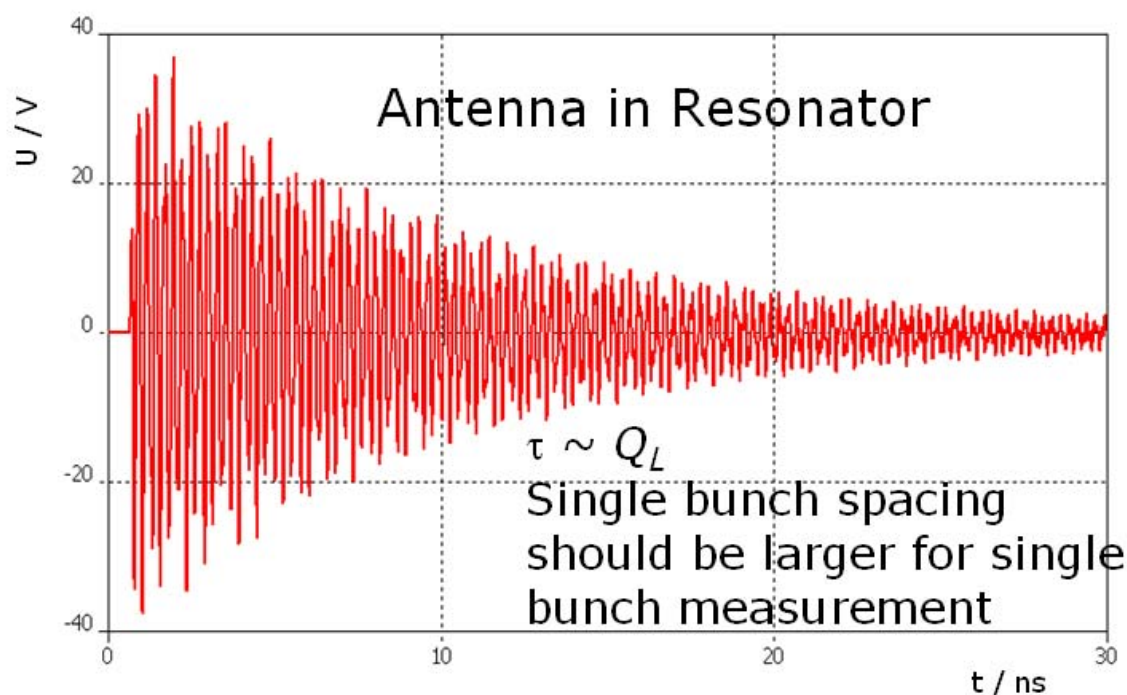

τ = decay time
 Q_L = loaded
 Quality factor


Damping of
 resonance with
 $\exp(-t/\tau)$

Q = Beam Charge
 r = Beam offset

By measuring r the
 beam offset is
 obtained
 → Beam Position
 Monitor (BPM)

BTW: 2 ports per
 plane

Basic Principle

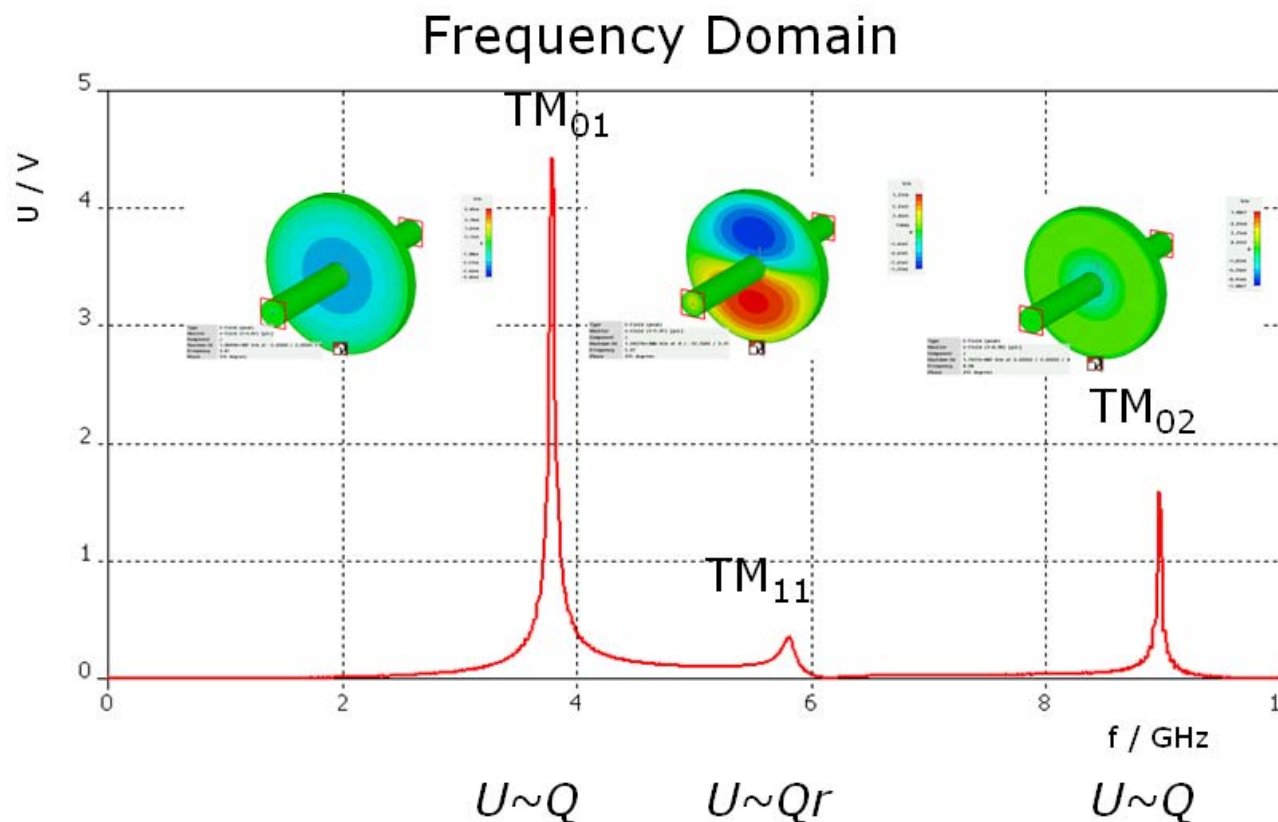

τ = decay time
 Q_L = loaded
 Quality factor

Damping of
 resonance with
 $\exp(-t/\tau)$

Q = Beam Charge
 r = Beam offset


By measuring r the
 beam offset is
 obtained
 → Beam Position
 Monitor (BPM)

BTW: 2 ports per
 plane


For charge normalization and sign: Reference Resonator or
 Monopole Mode

Problem: Monopole Mode (TM₀) leakage into Dipole Mode (TM₁)

Brief History of Cavity BPM until 1998

- 
- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
 - After that various configurations mostly for linear accelerators
 - Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
 - At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
 - In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
 - Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
 - At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm


Brief History of Cavity BPM until 1998

- 
- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
 - After that various configurations mostly for linear accelerators
 - Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
 - At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
 - In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
 - Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
 - At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm


Brief History of Cavity BPM until 1998


- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency

Ref: Farinholt et al., Microwave Beam Position Monitors at SLAC, PAC 1967

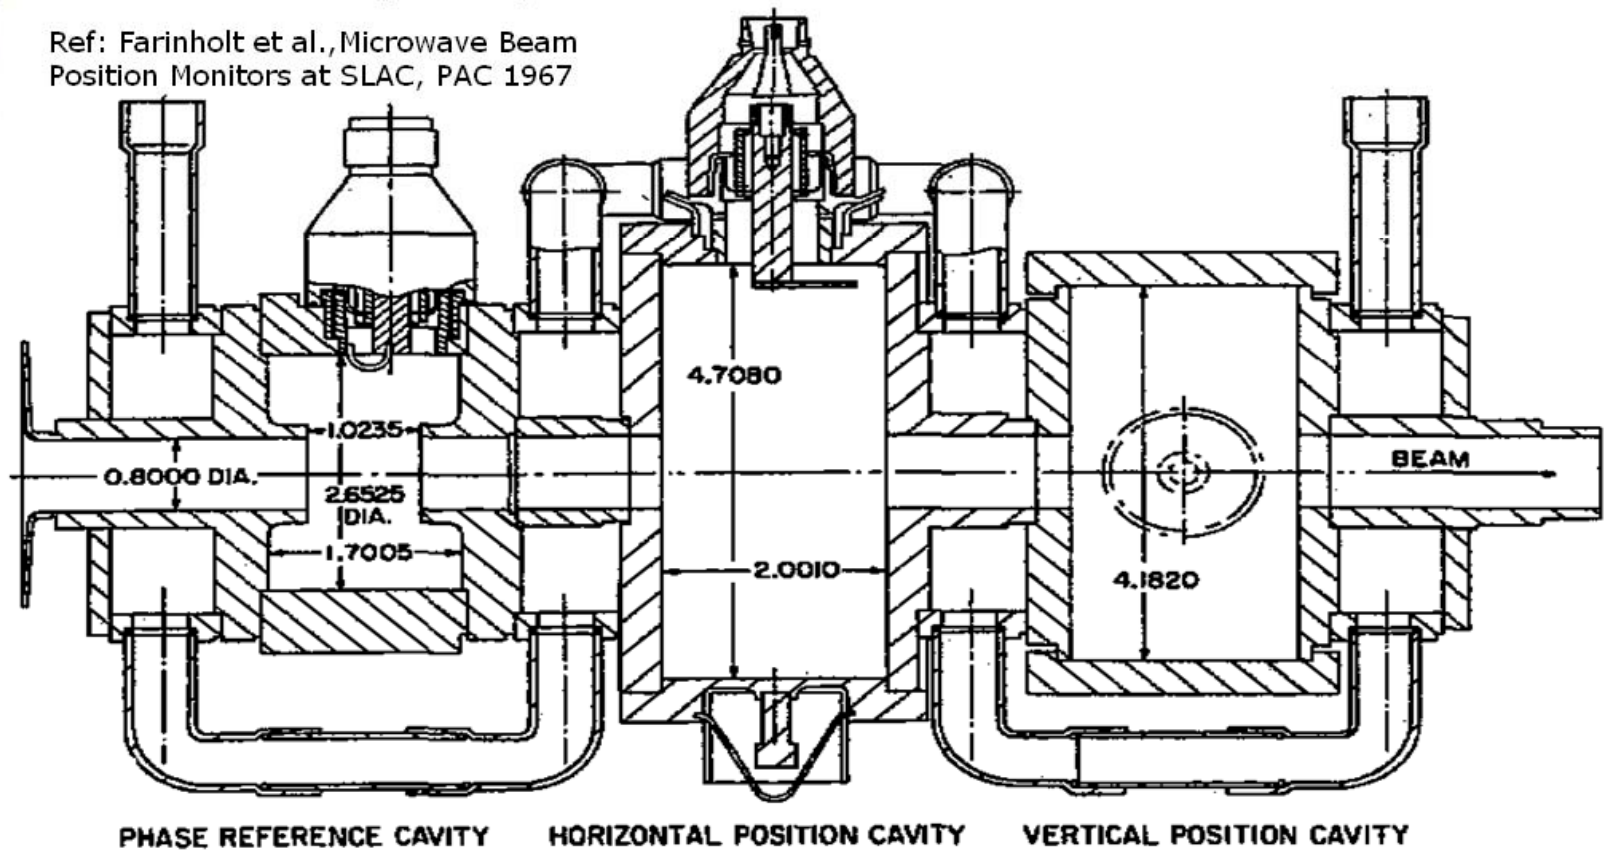


Brief History of Cavity BPM until 1998

- 
- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
 - After that various configurations mostly for linear accelerators
 - Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
 - At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
 - In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
 - Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
 - At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm

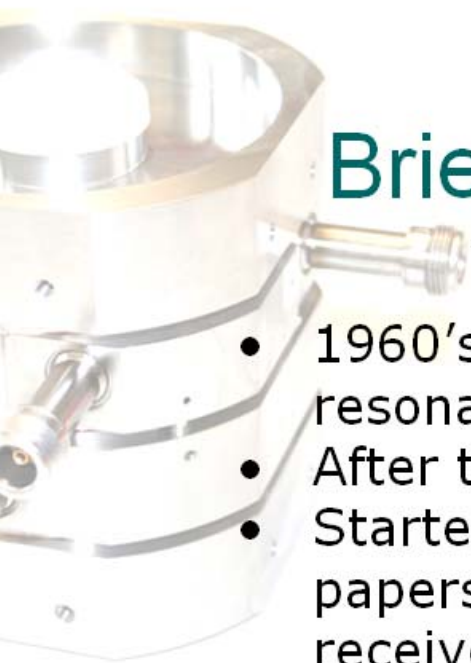

Brief History of Cavity BPM until 1998

- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
- After that various configurations mostly for linear accelerators
- Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
- At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
- In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
- Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
- At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm

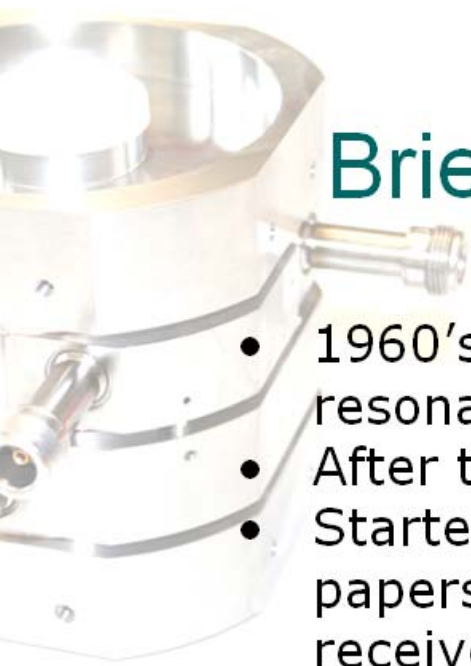

Brief History of Cavity BPM until 1998

- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
- After that various configurations mostly for linear accelerators
- Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
- At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
- In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
- Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
- At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm


Brief History of Cavity BPM until 1998



Magic-T

Ref: F. Caspers et al., RF
ENGINEERING - BASIC CONCEPTS


Arm 1
BPM

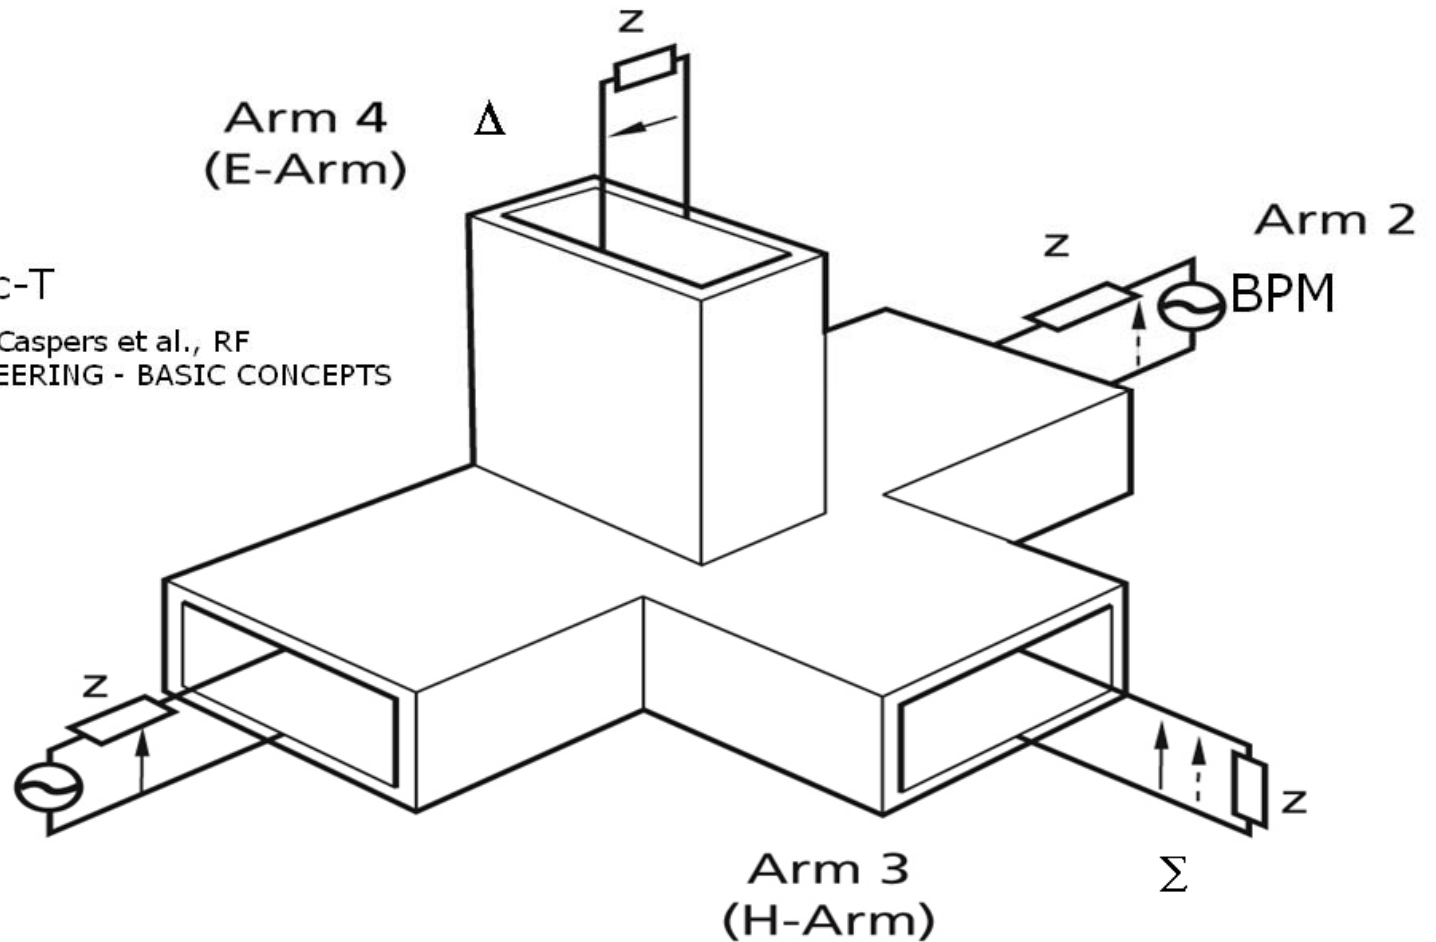

Brief History of Cavity BPM until 1998


- 
- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
 - After that various configurations mostly for linear accelerators
 - Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
 - At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
 - In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
 - Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
 - At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm

Brief History of Cavity BPM until 1998

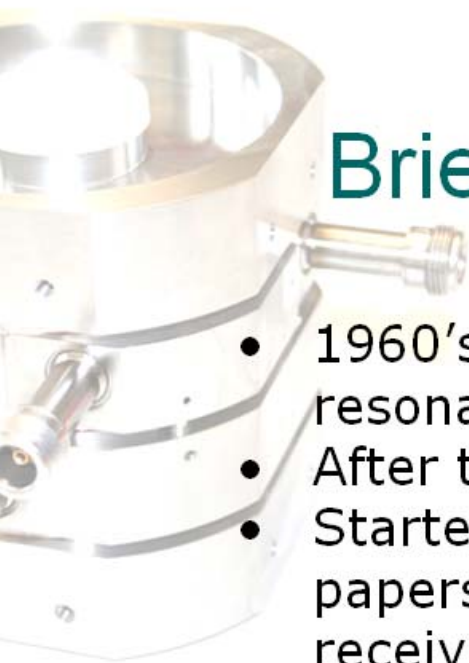


- 1960's at SLAC rectangular Cavity resonance frequency
- After that various configurations n
- Started in 1980's with future e^+e^- papers: use of modern microwave receiver might be sufficient
- At that time use of a magic-T to fil modes
- In early 1990's VLEPP proposed sp common mode; realized but not te
- Same time at CLIC 30 GHz TM_{11} cy T and narrow-band system: showed $4 \mu m$
- At SLAC 1998 cylindrical cavity with magic-T and narrow-band system v

Ref: V. Balakin, V. Vogel, M. Solyak; LC91

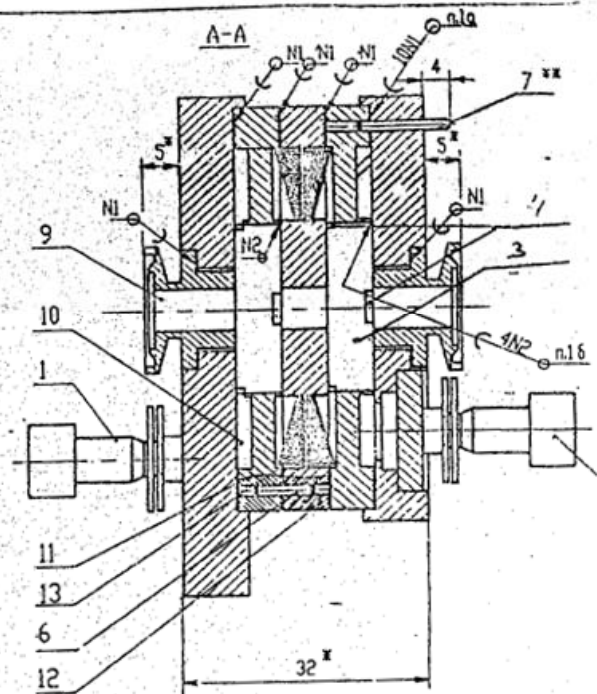

1. Vertical output
2. Horizontal output
3. Vacuum connection
4. Narrow slots
5. E_{11} cavity
6. Space filter
7. Damping cavity

Brief History of Cavity BPM until 1998

- 
- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
 - After that various configurations mostly for linear accelerators
 - Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
 - At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
 - In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
 - Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4\ \mu\text{m}$
 - At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm

Brief History of Cavity BPM until 1998



Ref: J.P.H. Sladen
et. al., EPAC96


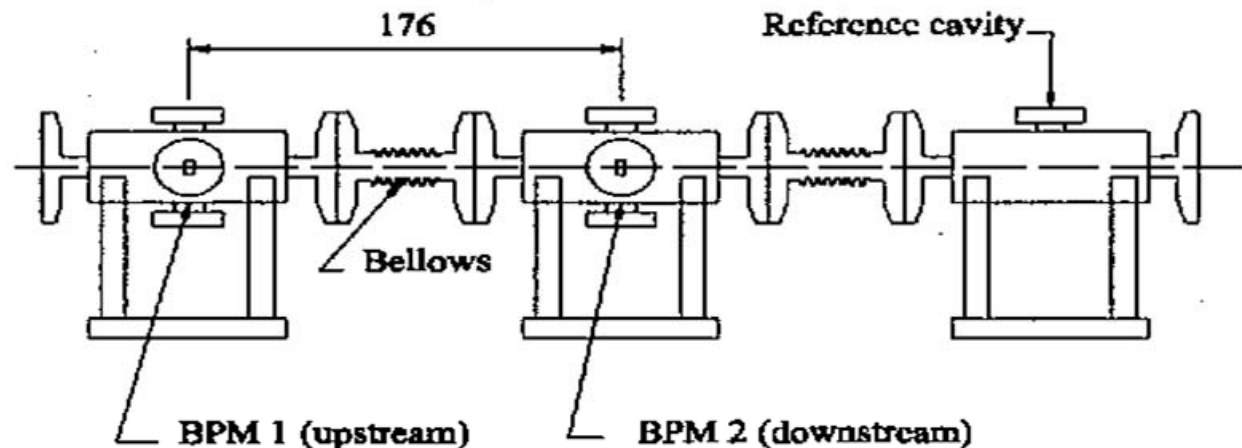


Figure 1: Test set up. From left to right BPM 1, BPM 2, and the reference cavity.

- Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
- At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm

Brief History of Cavity BPM until 1998

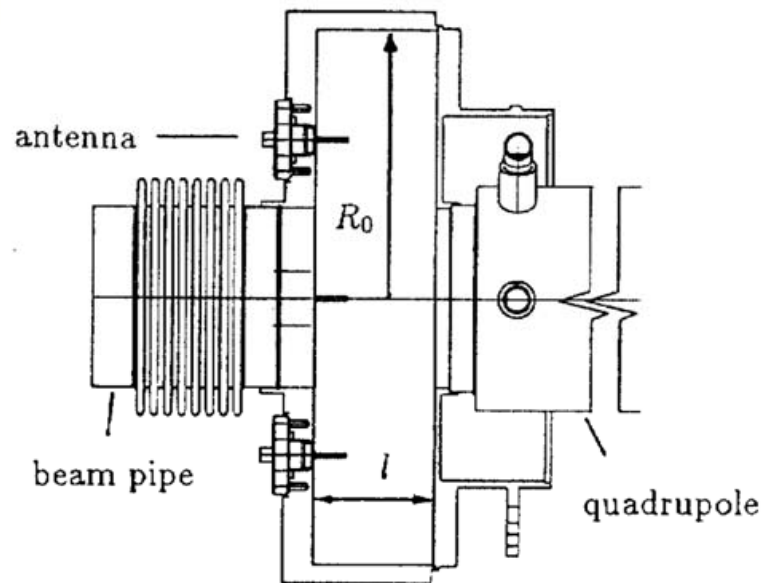


DESY: R. Lorenz for TTF cold module

Ref: EPAC 1994

$f = 1.517$ GHz

Pipe diameter = 78 mm

Present resolution: $10 \mu\text{m}$
with 1 nC

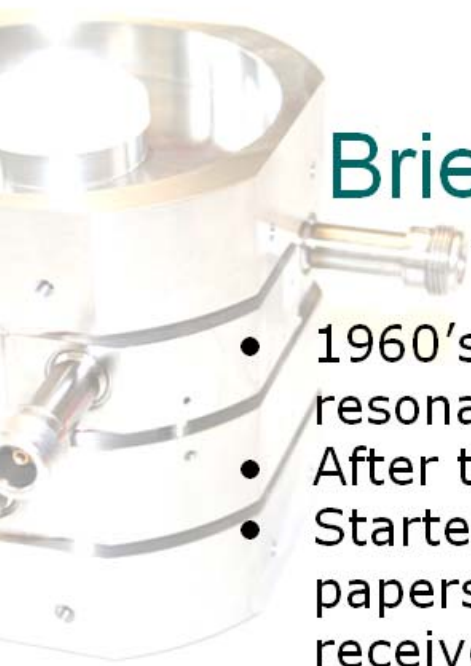

Brief History of Cavity BPM until 1998

- 1960's at SLAC rectangular Cavity BPM with 2856 MHz dipole resonance frequency
- After that various configurations mostly for linear accelerators
- Started in 1980's with future e^+e^- linear colliders many papers: use of modern microwave technology, narrow-band receiver might be sufficient
- At that time use of a magic-T to filter TM_{11} and damp TM_{01} modes
- In early 1990's VLEPP proposed special cavity to eliminate common mode; realized but not tested with beam
- Same time at CLIC 30 GHz TM_{11} cylindrical cavity with magic-T and narrow-band system: showed upper limit of resolution $4 \mu\text{m}$
- At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm

Brief History of Cavity BPM until 1998

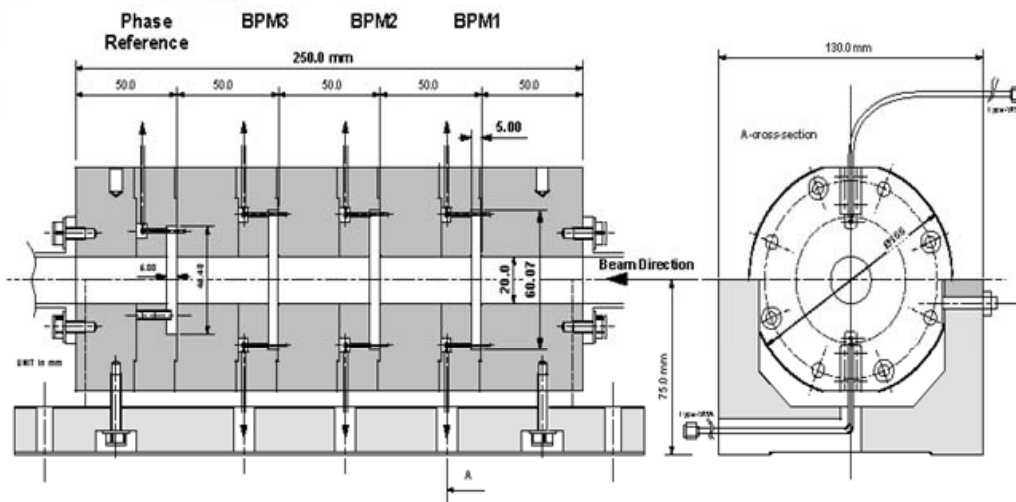


Fig. 1 C-band RF-BPM tested at FFTB. Three BPM cavities and one phase reference cavity were assembled in one block.

Ref: T. Shintake, HEAC 1999

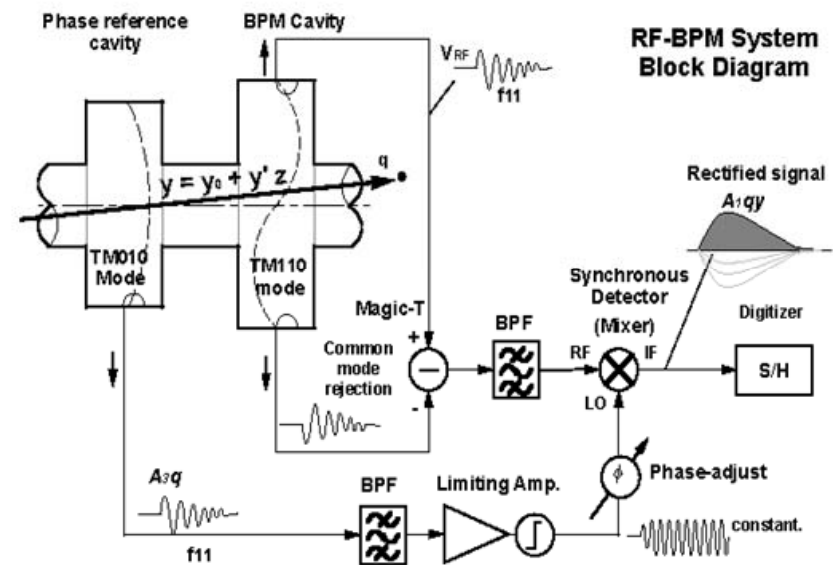




Fig. 2. Simplified RF-BPM Diagram.

- At SLAC 1998 cylindrical cavity with TM_{11} at 5712 MHz and magic-T and narrow-band system with resolution near 25 nm



Reject Monopole Mode

Ref: V. Vogel
Nanobeam 2005

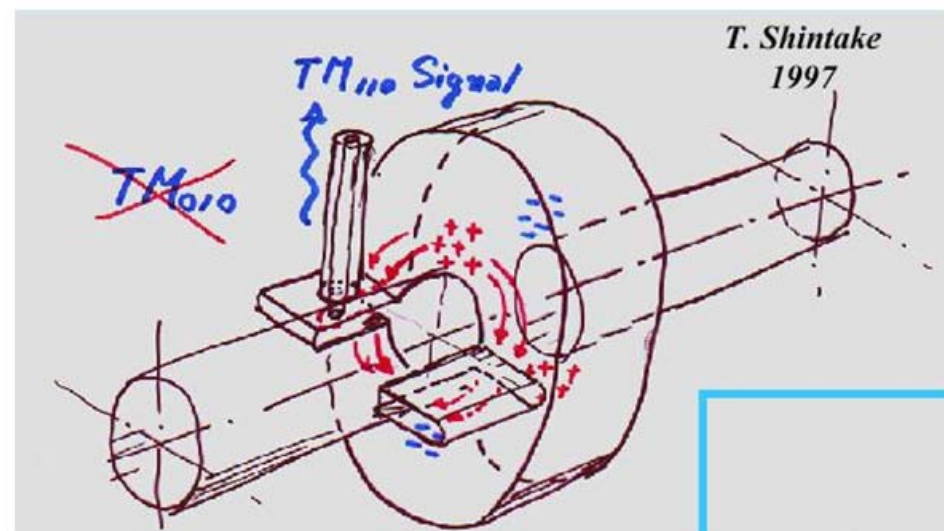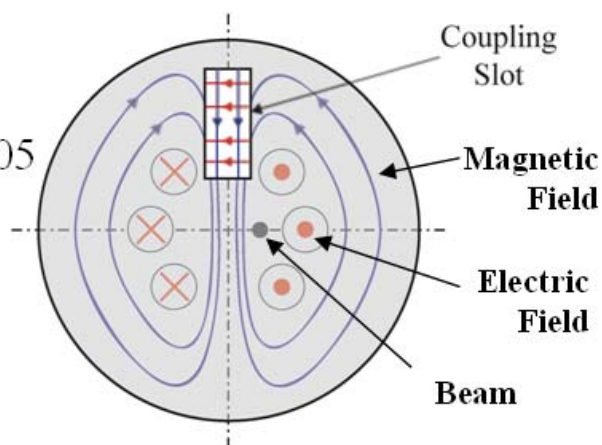

Dipole Mode is surrounded by magnetic fields


Between both magnetic fields a TE_{10} is produced which matches with boundary condition of wave guide and is propagating

Monopole Mode does not match with boundary condition of wave guide


Ref: V. Balakin et al., PAC 1999

Reject Monopole Mode

Monopole Mode

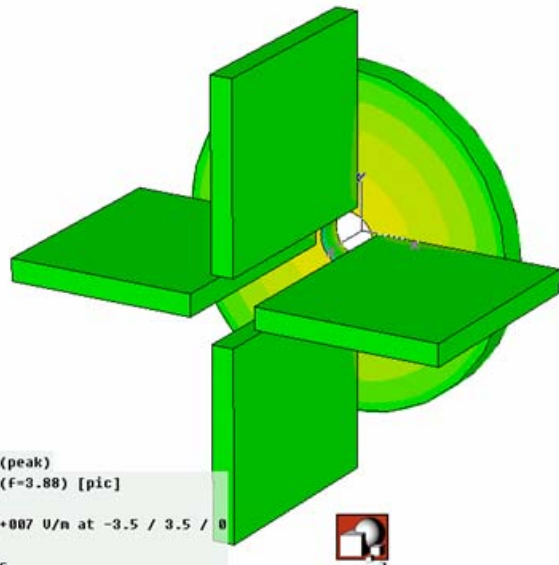

Dipole Mode



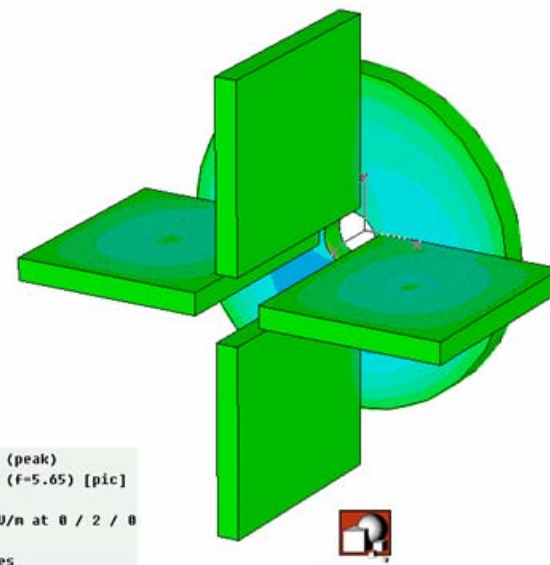


Simulation to show

- propagation of dipole mode in waveguide
- monopole mode no propagation in waveguide


Influence of beam angle and bunch tilt

$$U = C \sin(\omega t) + C^* \sin(\omega L/(4c)) \cos(\omega t) + C^{**} \sin(\omega \sigma_z/c) \cos(\omega t)$$

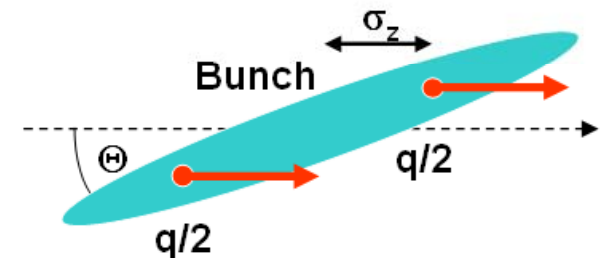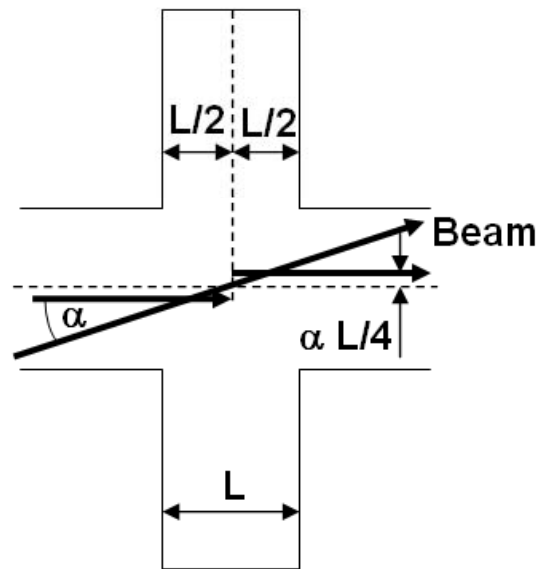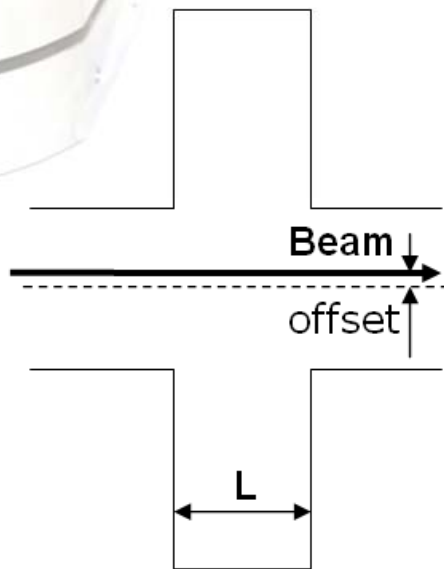

Both parts are shifted by 90° compared to the offset signal

Cavity BPM around the World

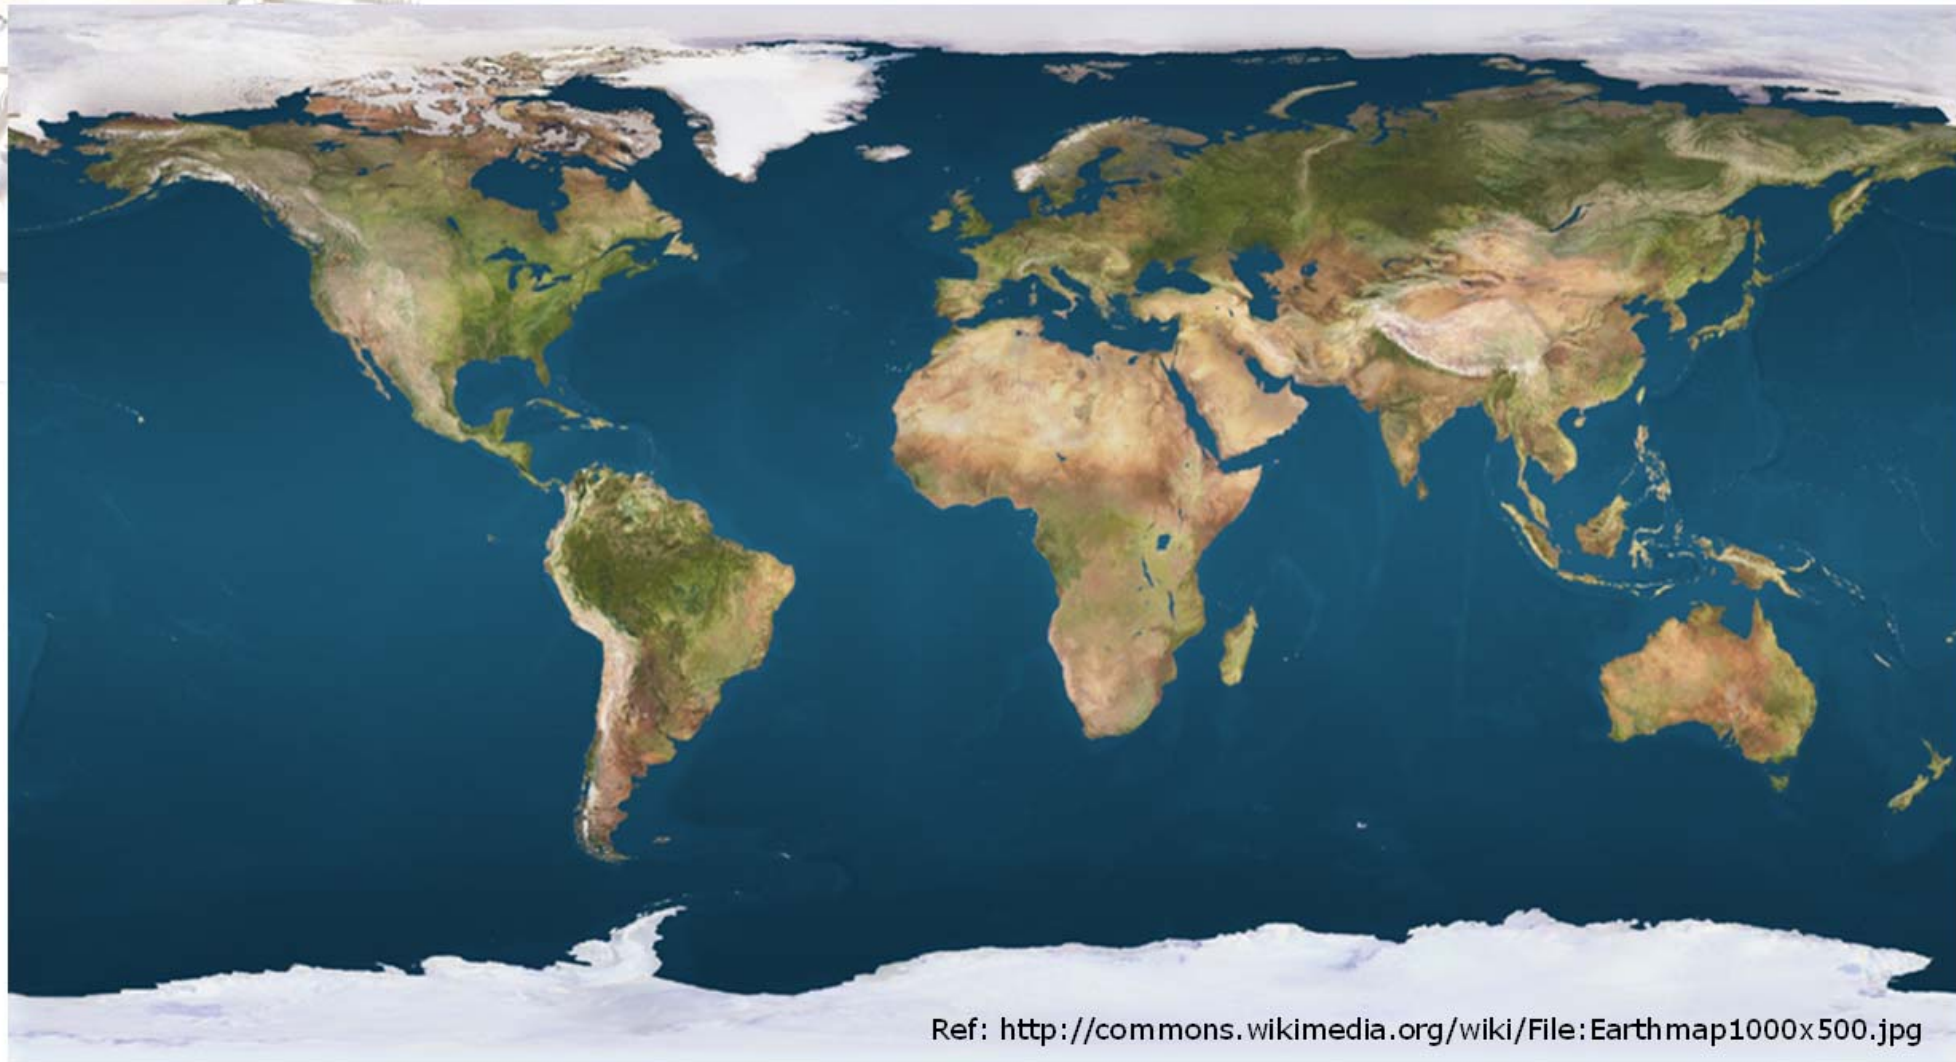

Cavity BPM around the World



SPring-8 Compact SASE Source




Prototype Accelerator


ker: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>

Cavity BPM at SCSS Prototype Accelerator

Required resolution: $< 0.5 \mu\text{m}$

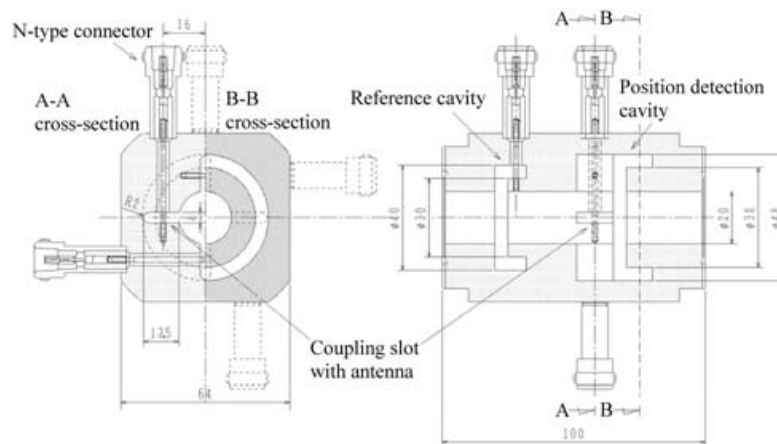


Material: Stainless Steel
Pipe diam.: 20 mm

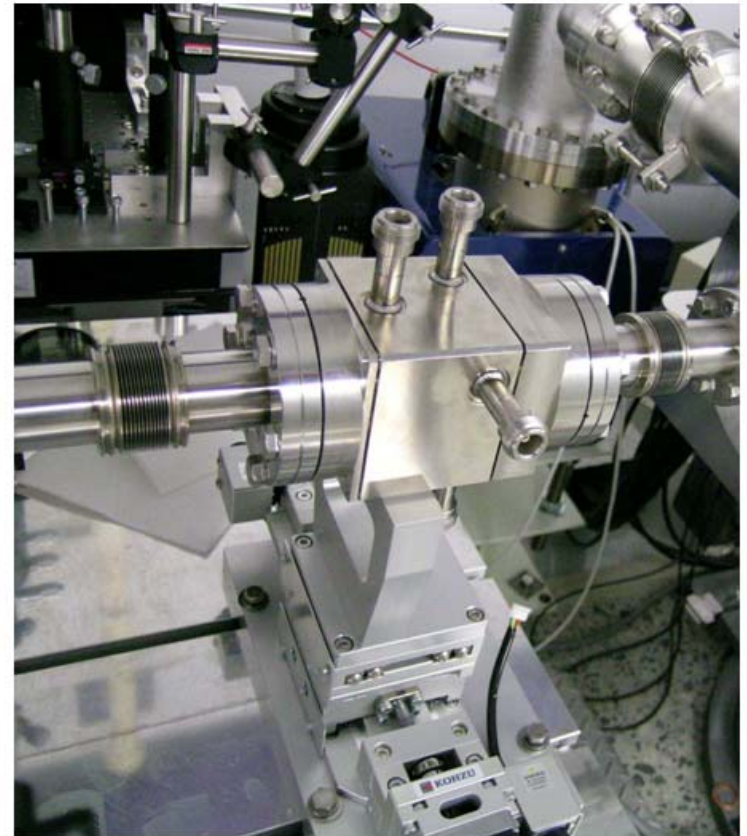



Cavity BPM at SCSS Prototype Accelerator



- Developed circuit with IQ demodulators.
 - IQ demodulator can detect all phase angles.
 - Amplitude is linear.
 - The 90 deg. signal is easily distinguished.
 - The dynamic range is expanded with rf switches and attenuators.

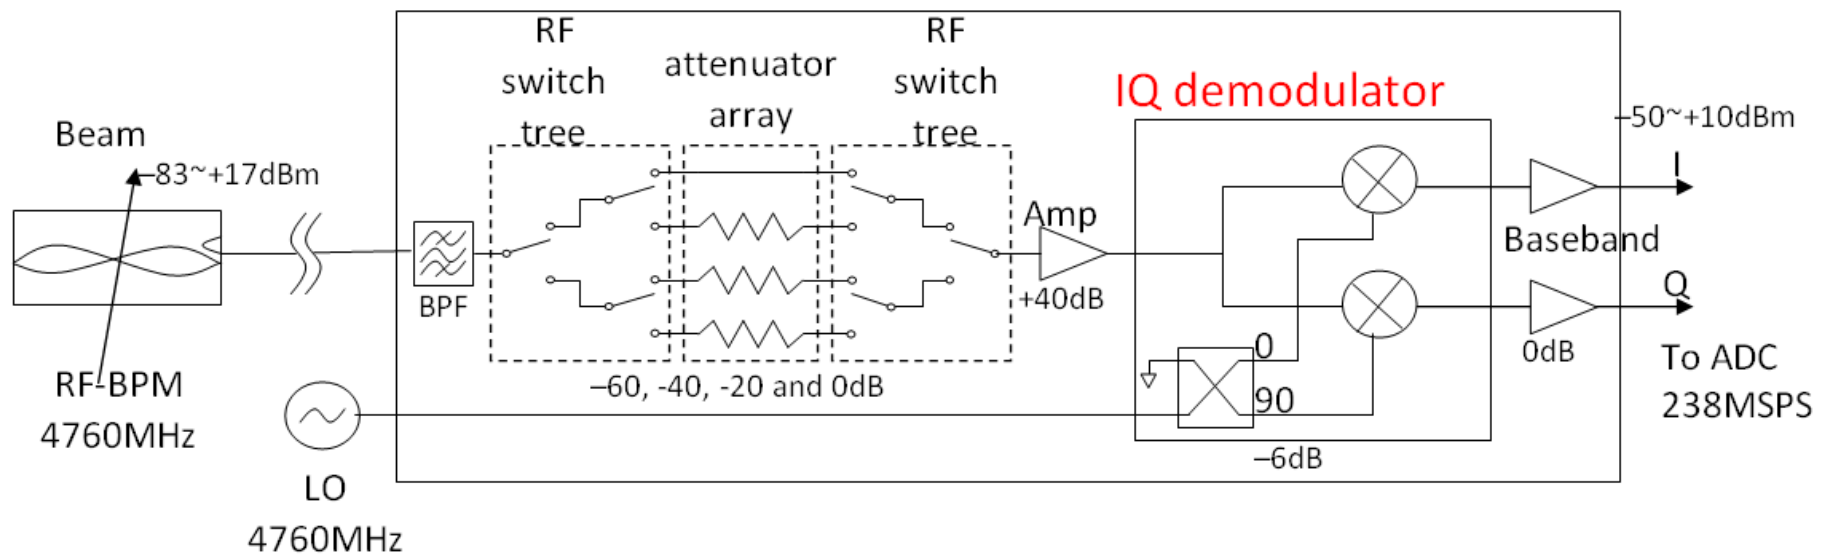


Cavity BPM at SCSS Prototype Accelerator

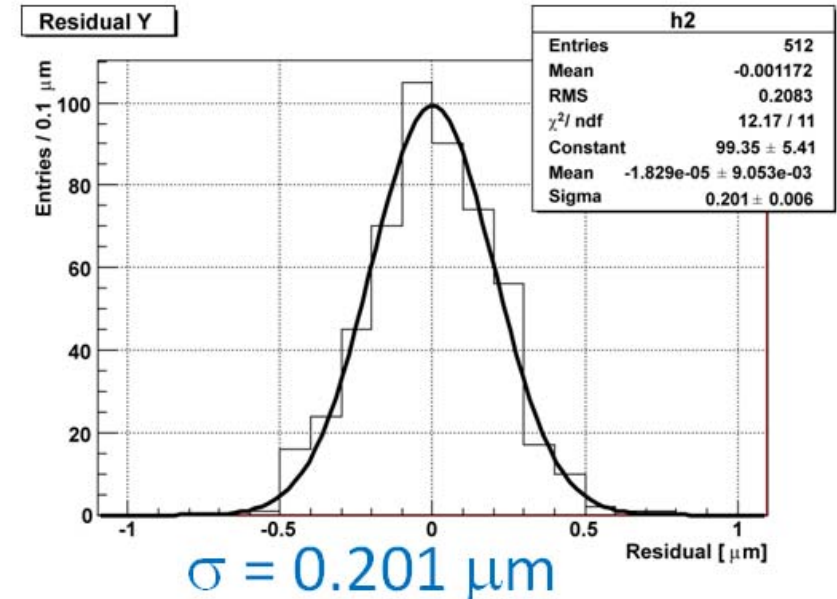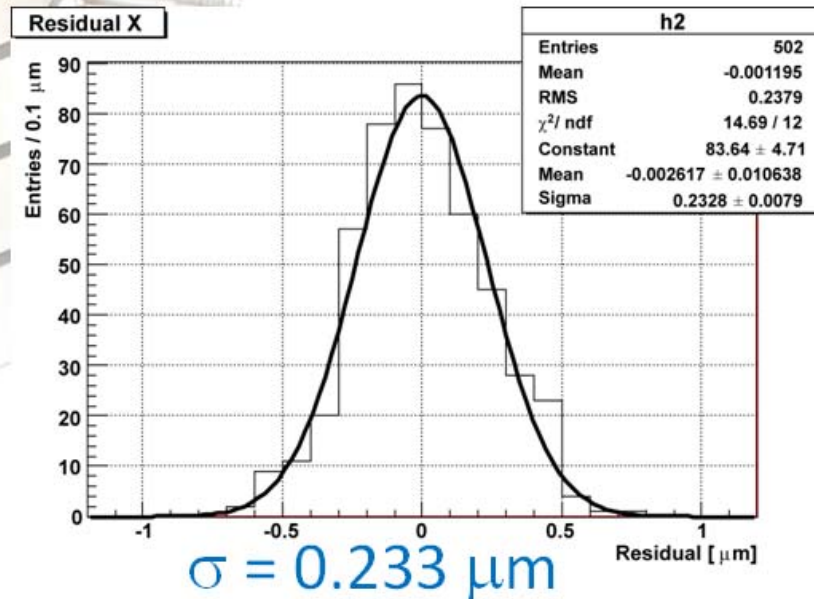

- Assuming the three BPMs have the same resolutions, we obtained at 0.3 nC:
 - X resolution: **0.198 μm**
 - Y resolution: **0.171 μm**
- XFEL requirement, **< 0.5 μm** , is satisfied.

See poster H. Maesaka: MOPD07



Cavity BPM around the World

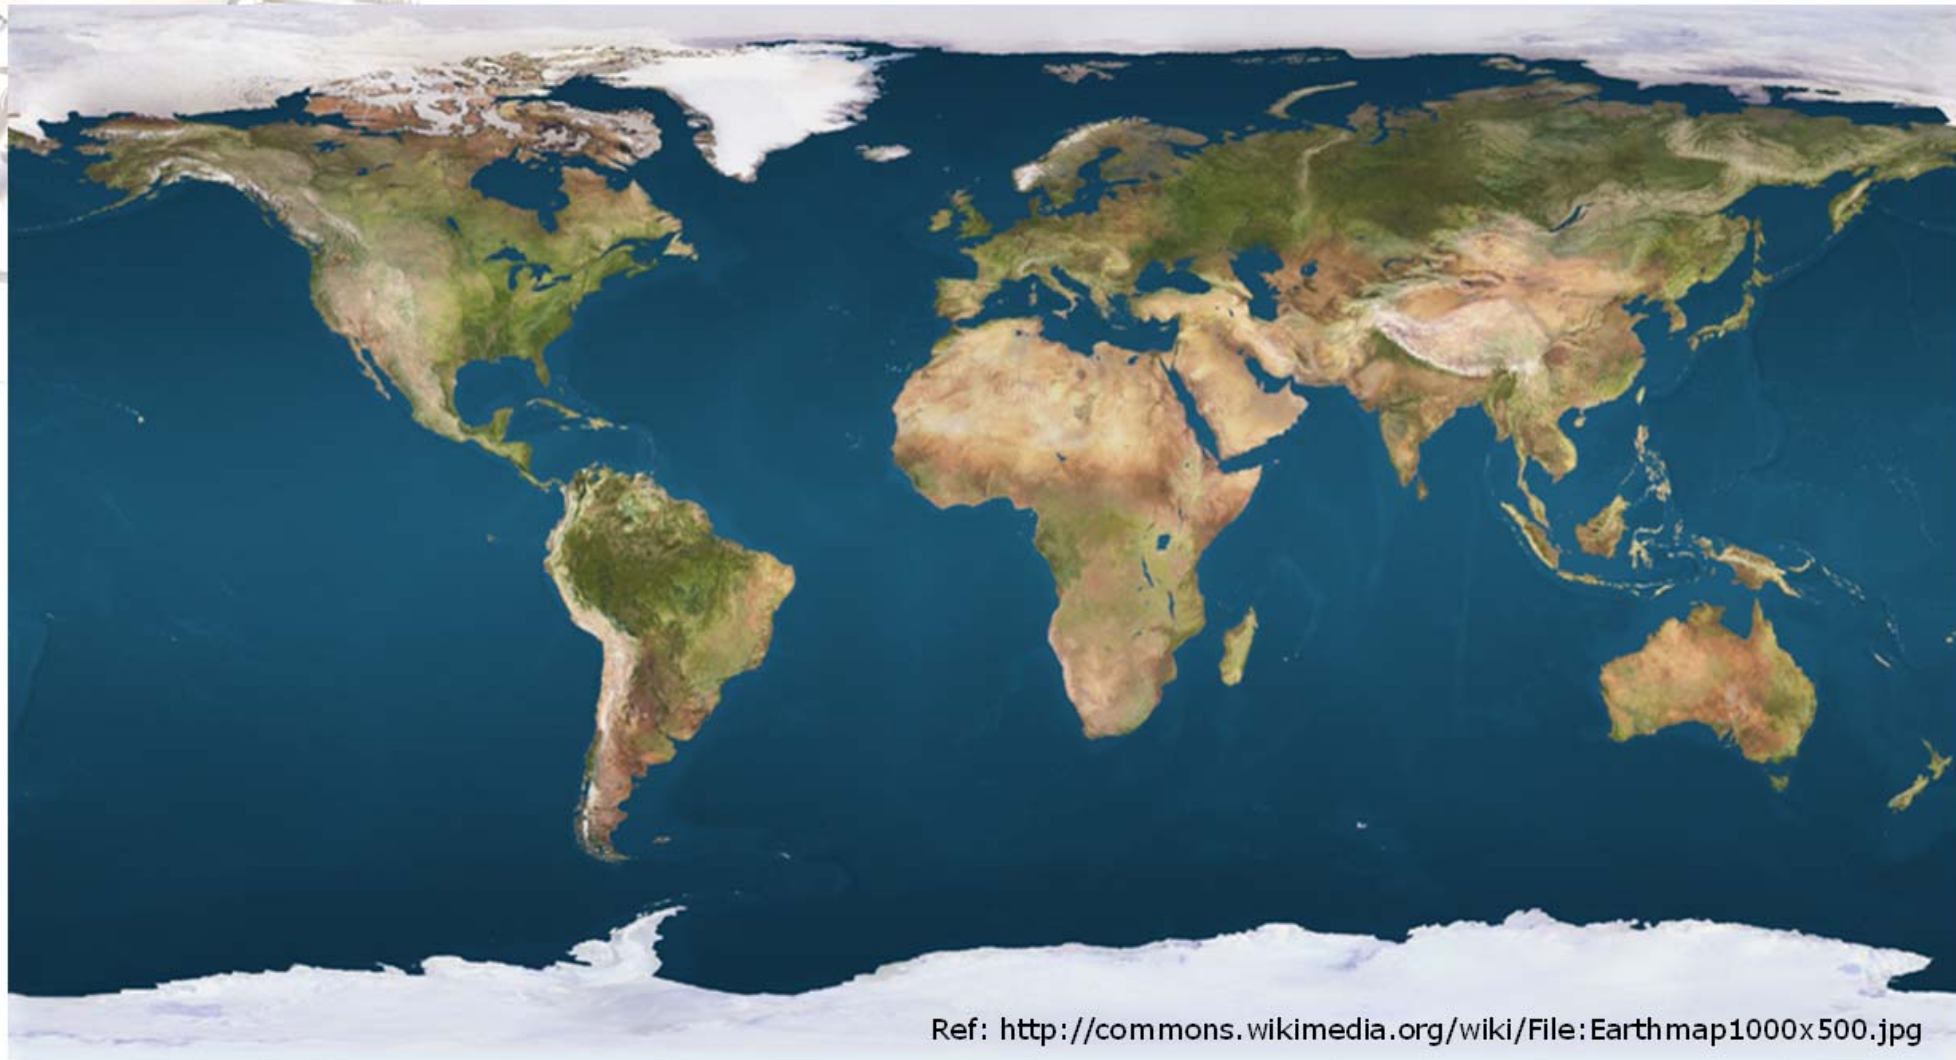

Ref: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>


Cavity BPM around the World

Undulator Cavity BPM for the European XFEL

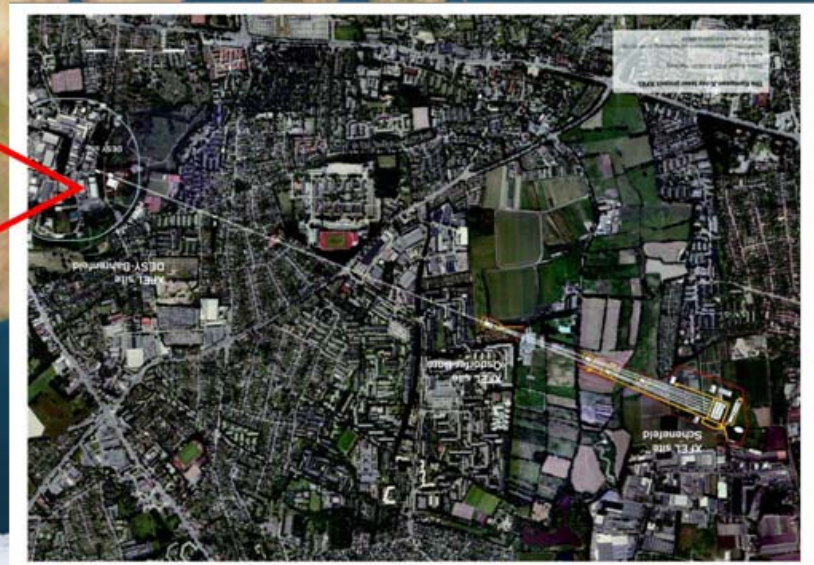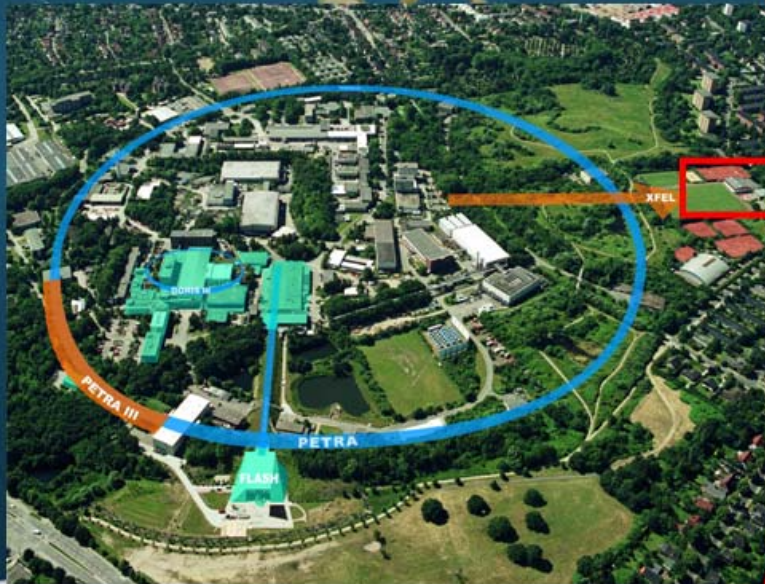


Ref: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>

Undulator Cavity BPM for the European XFEL

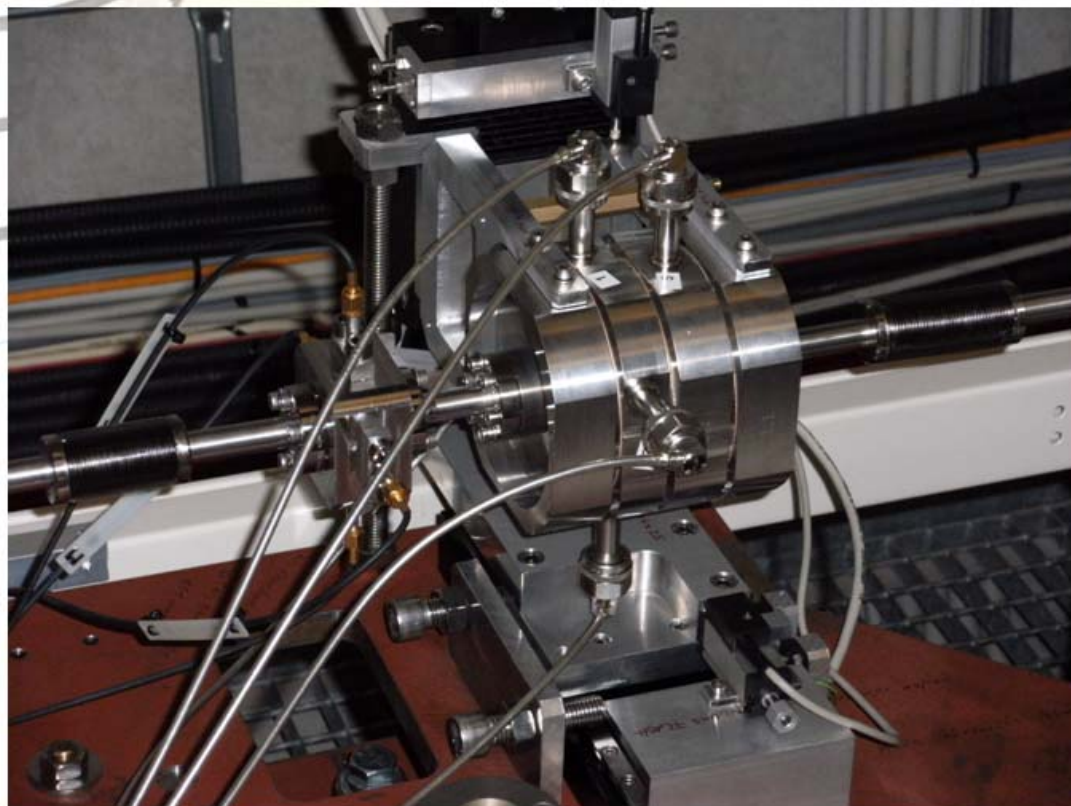

- Design from SPring-8 (T. Shintake)
- Produced six prototypes
 - $f = 3.3$ GHz (for larger pipe possible too)
 - $Q_L = 70$
 - Pipe diameter = 10 mm
- One prototype included at FLASH
- Orthogonal coupling: see contribution: MOPD02
- Next steps: 3 BPM in beamline with electronics


Cavity BPM around the World

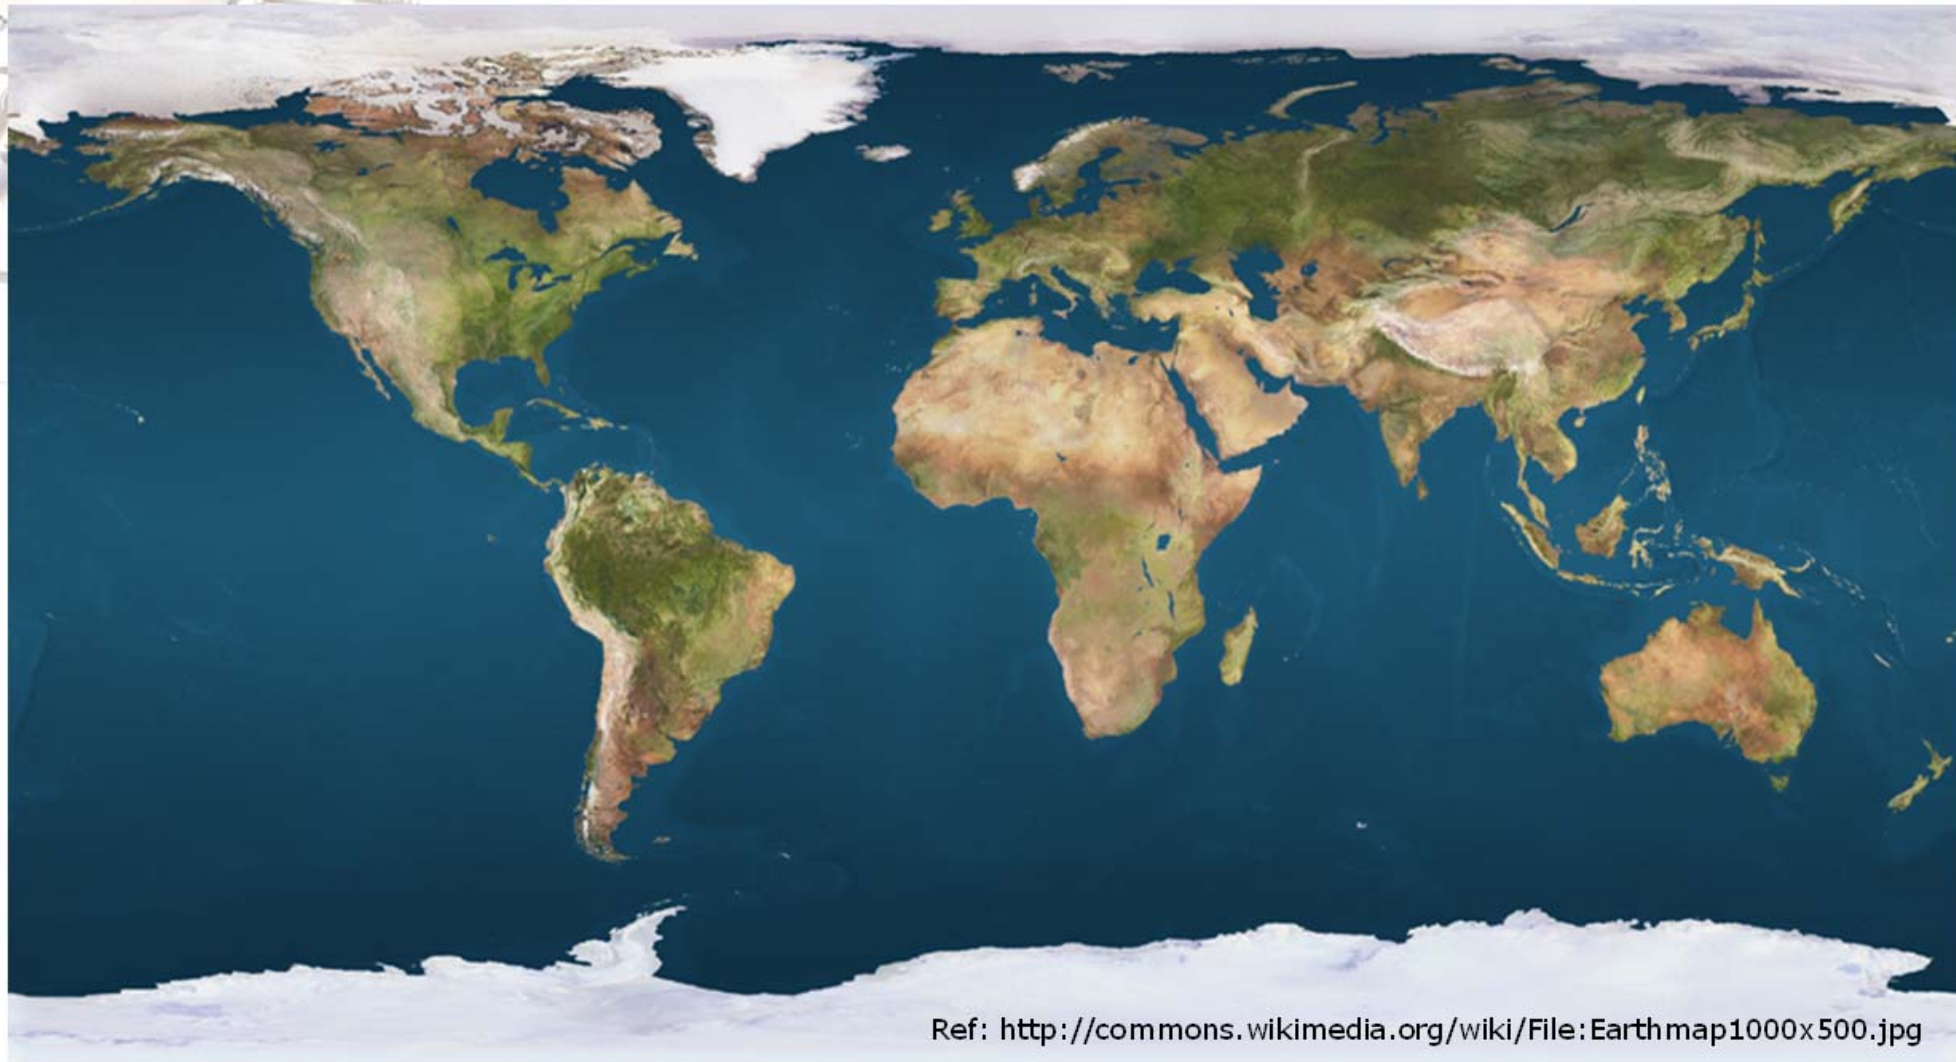


Cavity BPM around the World



Reentrant Cavity BPM
from Saclay

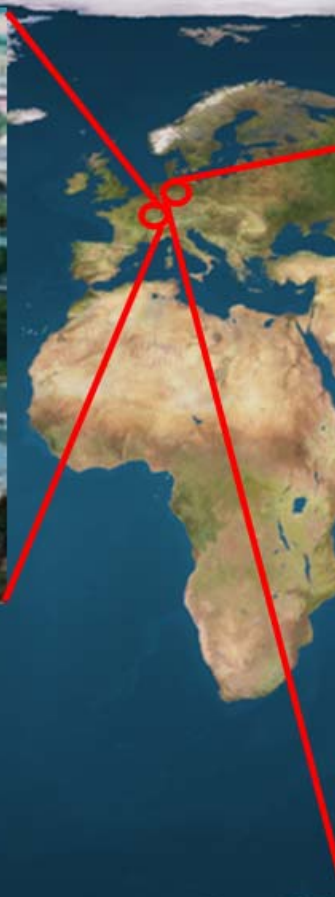

Tested at FLASH, DESY
Hamburg

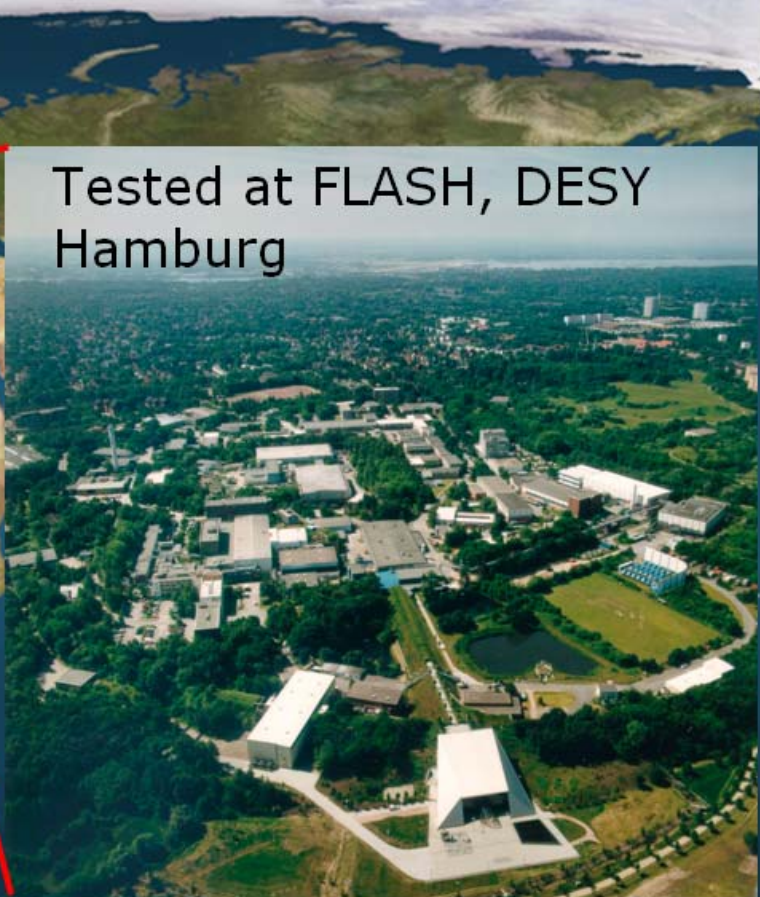

Ref: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>


Reentrant Cavity BPM

For cold accelerator of European XFEL, Resolution < 50 μm



Cryogenics tests at 4 K on feedthroughs is OK



Cu-Be RF contacts welded in the inner cylinder of the cavity to ensure electrical conduction.

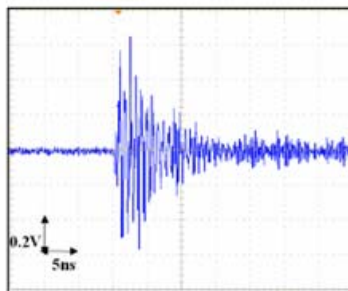

Signal from one pickup

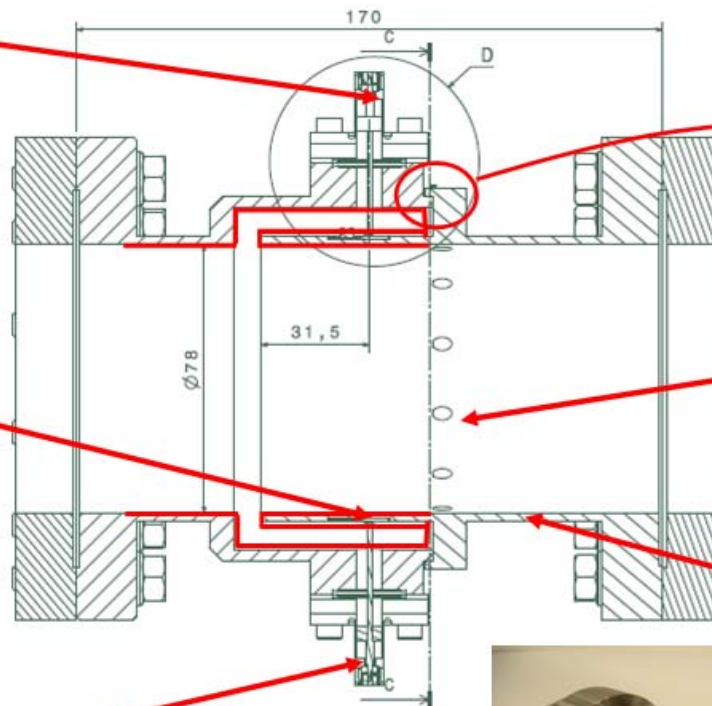

Twelve holes of 5 mm diameter drilled at the end of the re-entrant part for a more effective cleaning (Tests performed at DESY).

Copper coating (depth: 12 μm) to reduce losses. Heat treatment at 400°C to test: OK




Pipe diam.: 78 mm

Reentrant Cavity BPM



Eigen modes	F (MHz)		Q_i		$(R/Q)_i$ (Ω) at 5 mm	$(R/Q)_i$ (Ω) at 10 mm
	Calculated with HFSS in eigen mode	Measured in the tunnel	Calculated with HFSS in eigen mode	Measured in the tunnel	Calculated	Calculated
Monopole mode	1250	1255	22.95	23.8	12.9	12.9
Dipole mode	1719	1724	50.96	59	0.27	1.15

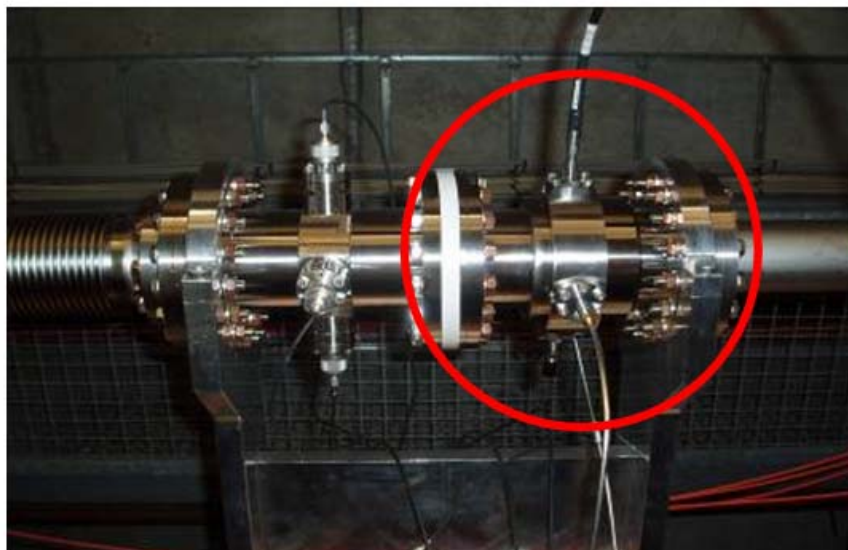



Re-entrant cavity BPM installed in a warm section on the FLASH linac




Reentrant Cavity BPM

The **rejection of the monopole mode**, on the Δ channel, proceeds in **three steps** :



- a rejection based on a **hybrid coupler** having isolation higher than 20 dB in the range of 1 to 2 GHz.
- a frequency domain rejection with a **band pass filter** centered at the dipole mode frequency. Its bandwidth of 110 MHz also provides a noise reduction.
- a **synchronous detection**.

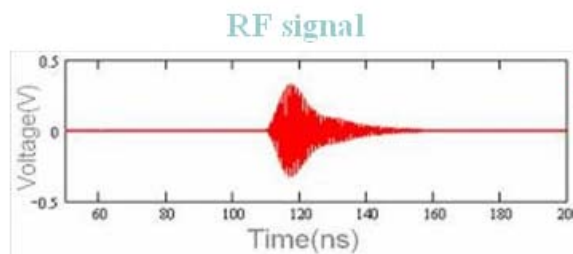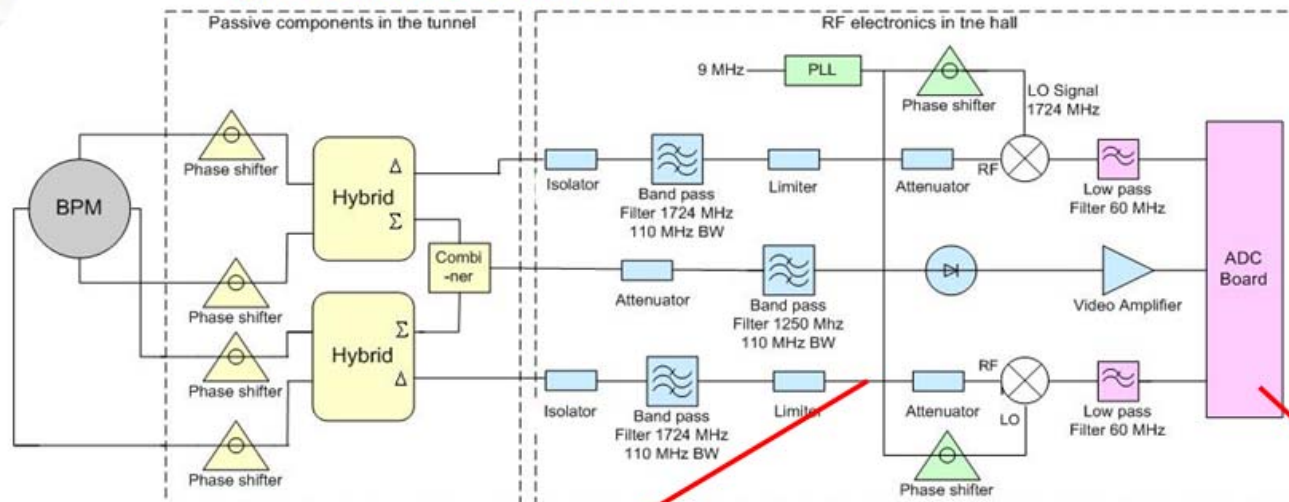

IF signal behind Lowpass Filter on channel Δ

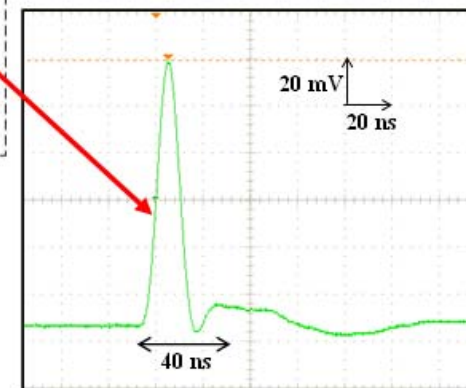

Reentrant Cavity BPM

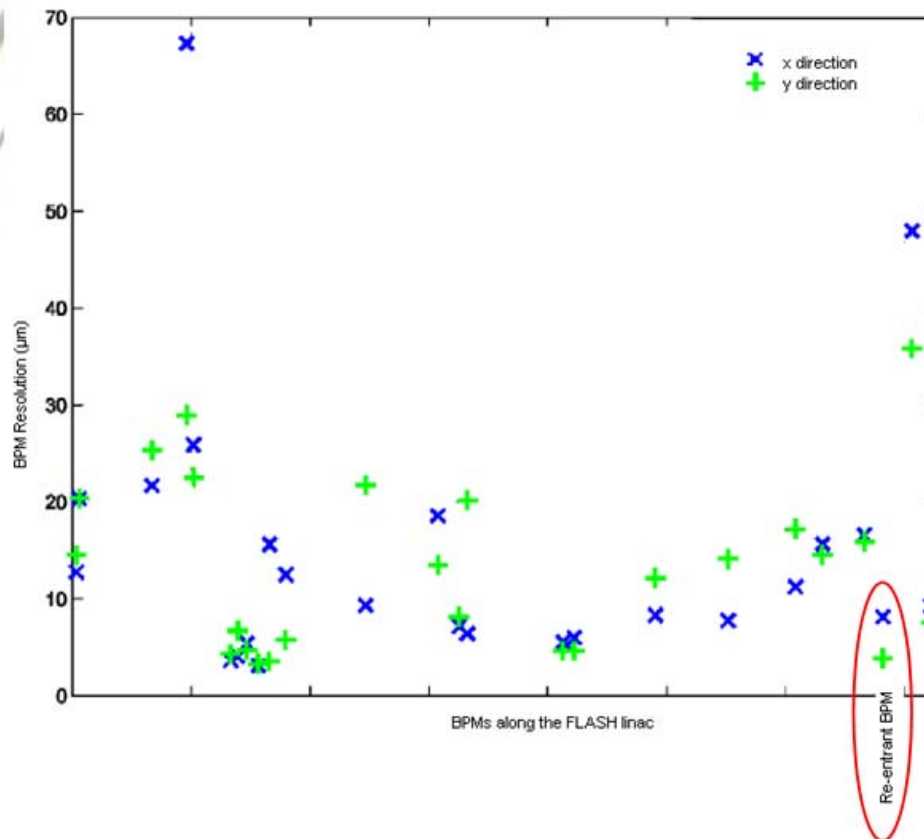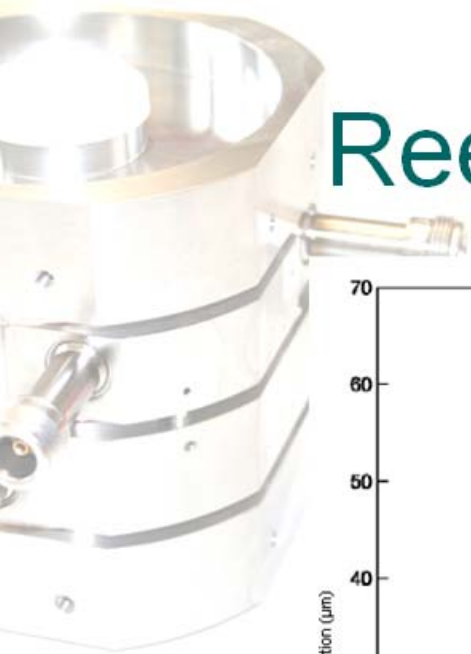


- Bunch to bunch measurements (**time resolution ~40 ns**)
- 30 reentrant cavity BPMs will be installed in the XFEL cryomodules

RMS resolution:


~4 μm on the Y channel	} with 1 nC and dynamic range +/- 5 mm
~8 μm on the X channel	

Cavity BPM around the World

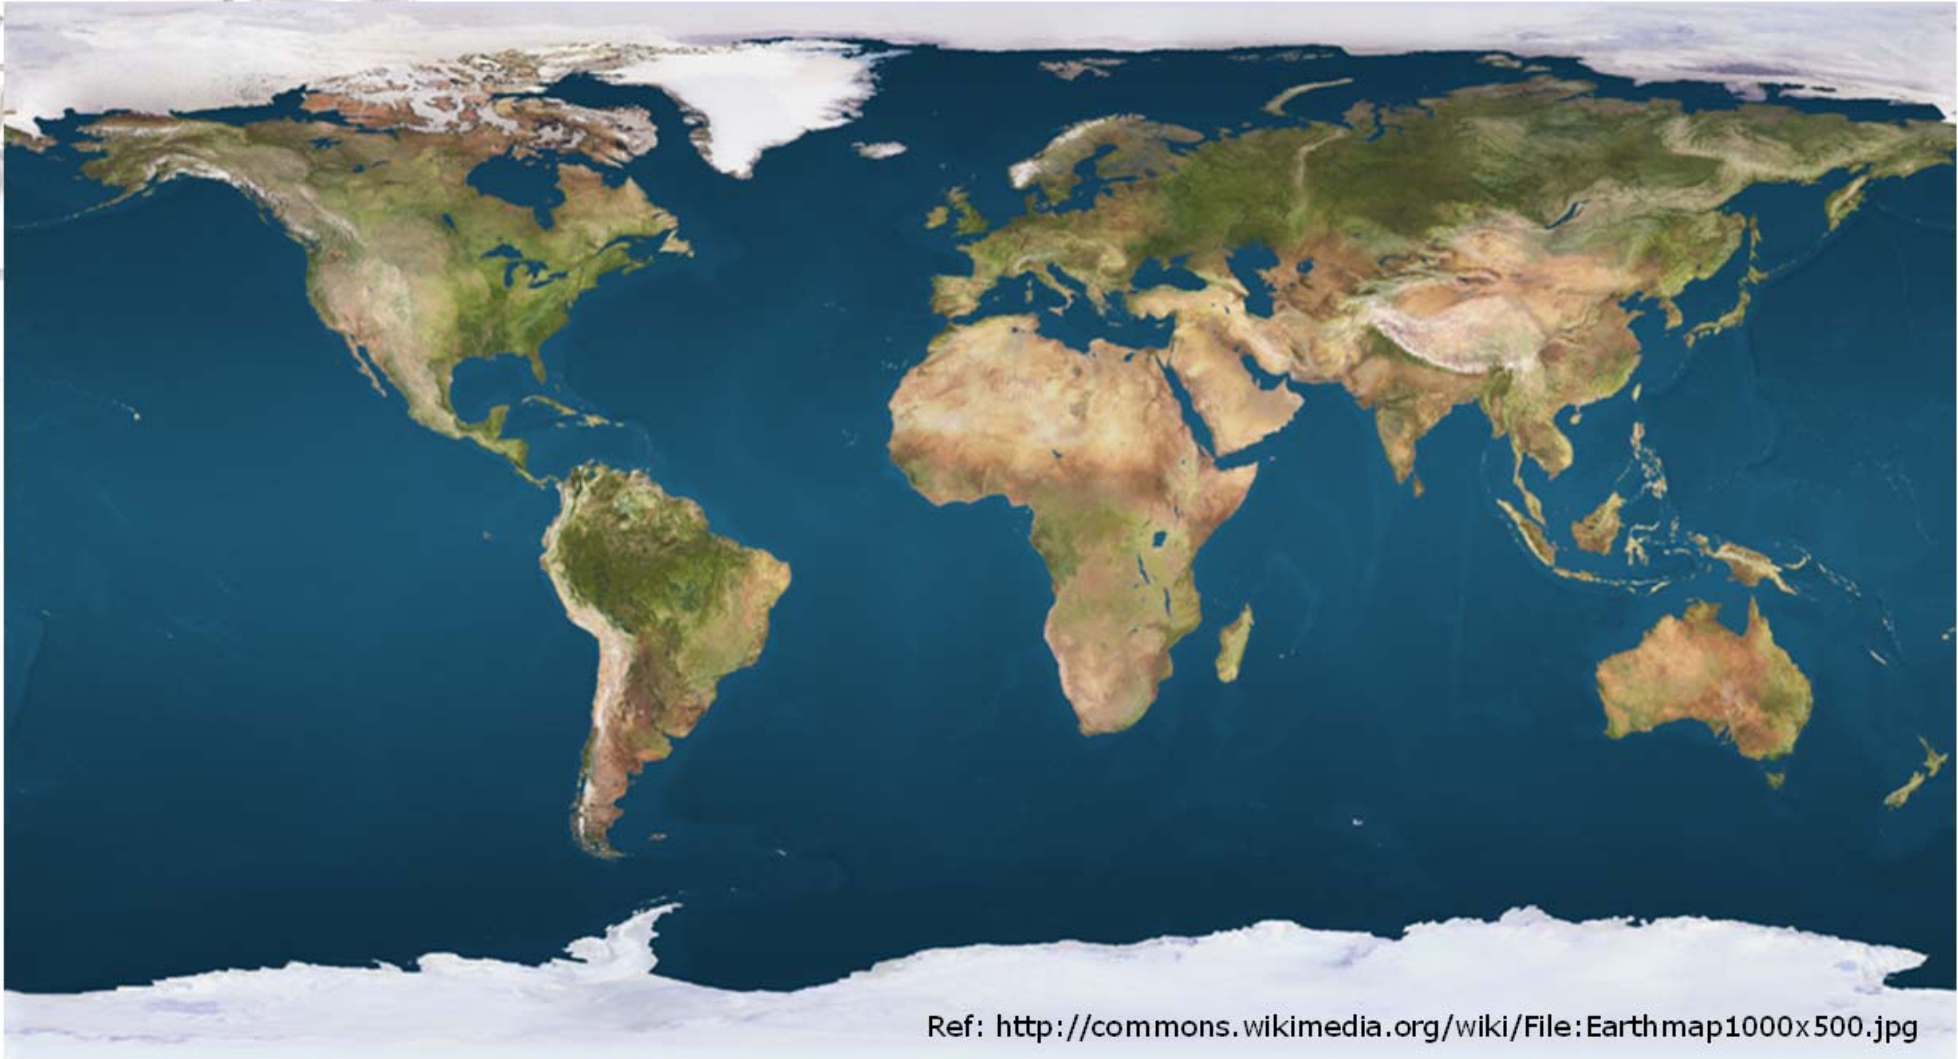



Ref: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>

Cavity BPM around the World

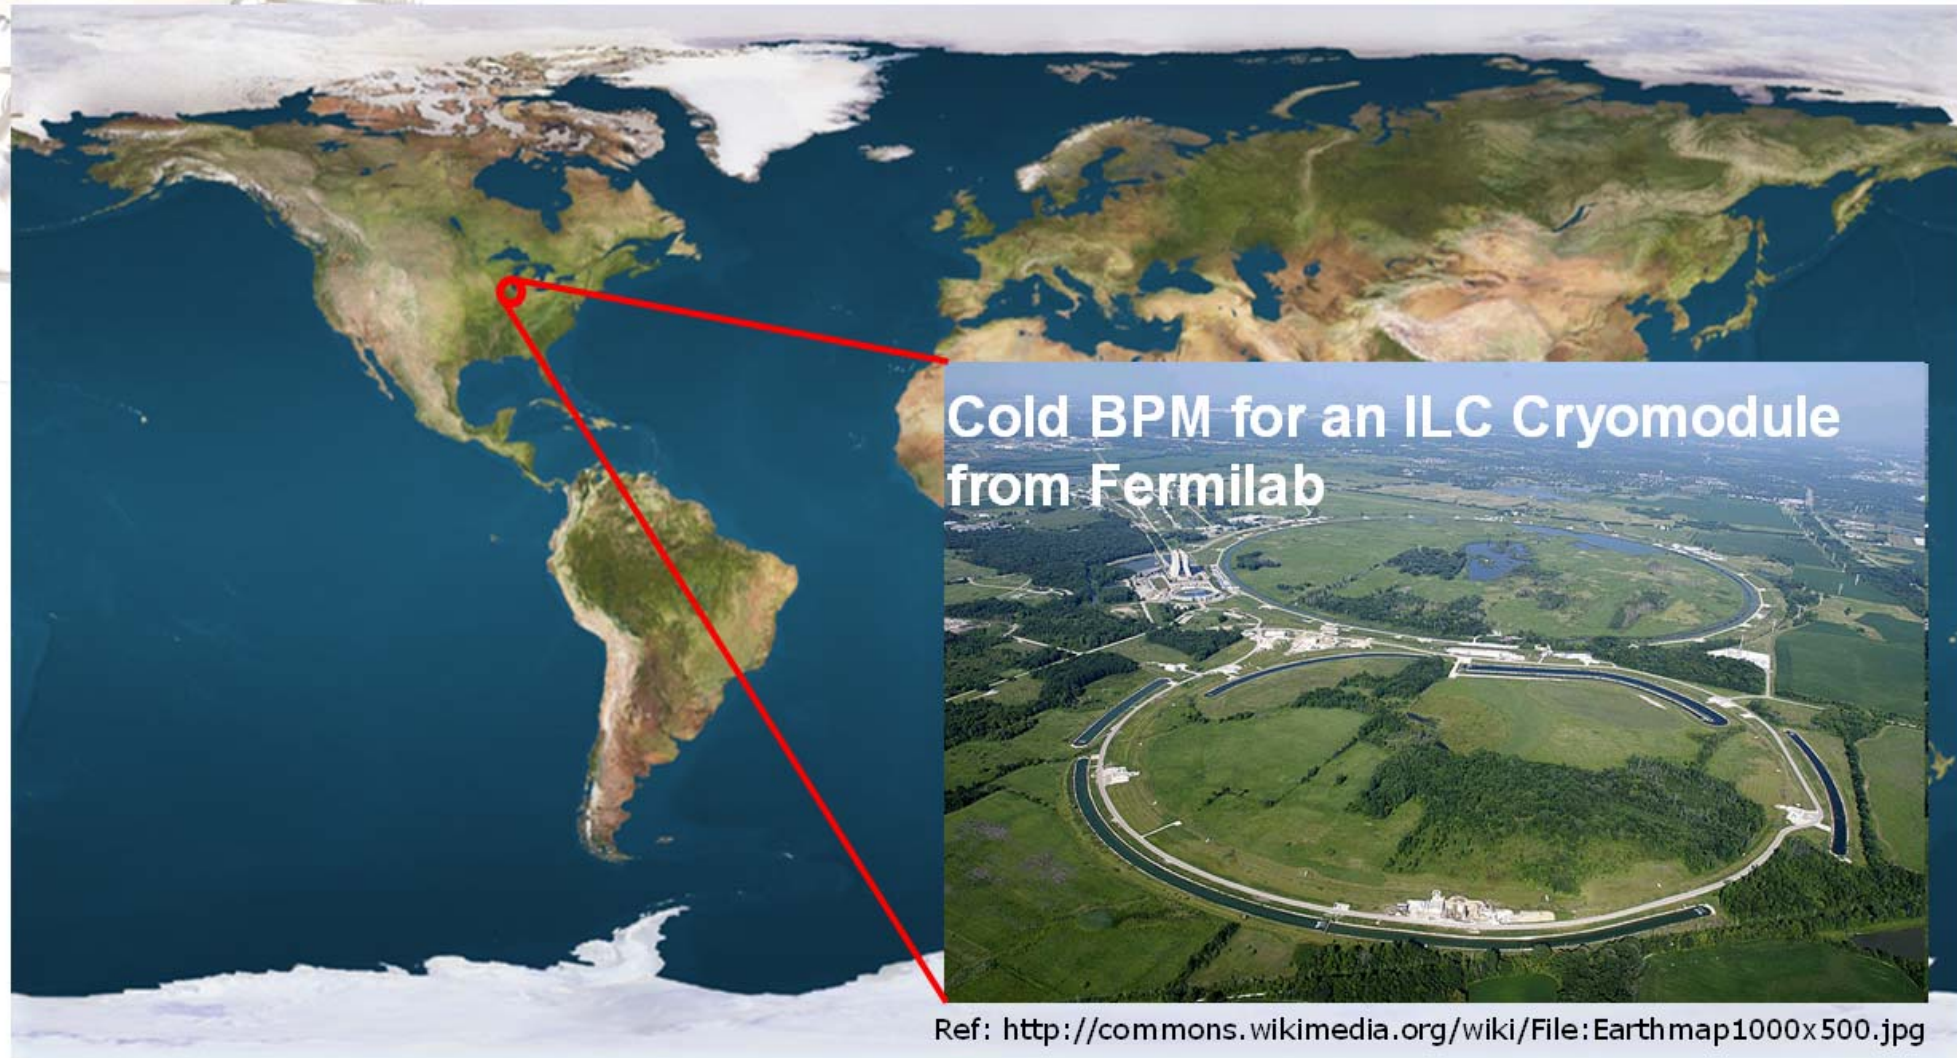

Cold BPM for an ILC Cryomodule




Window –
Ceramic brick
to simplify the
cleaning procedure

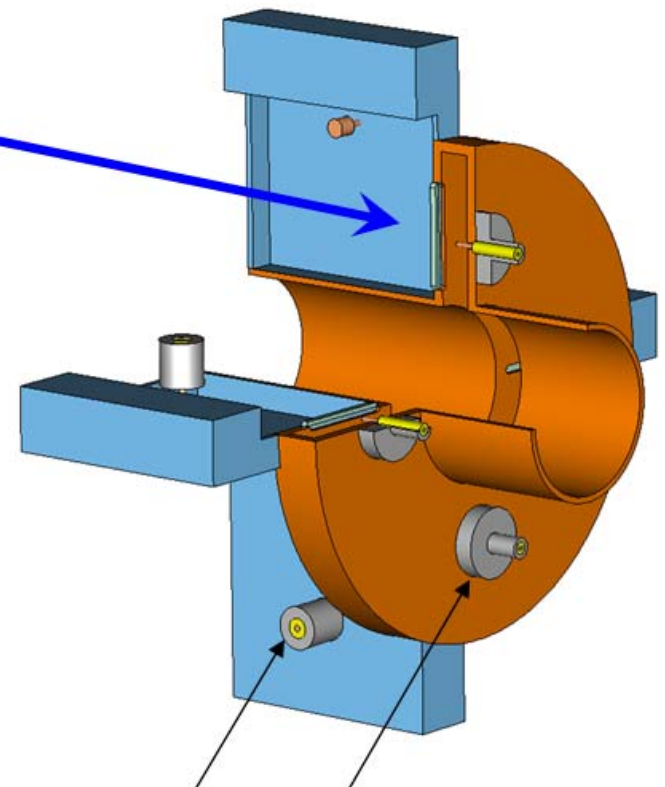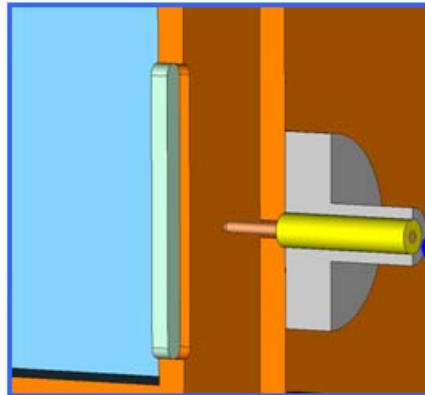

N type receptacles,
50 Ohm


Frequency, GHz, dipole	1.468
monopole	1.125
Loaded Q (both monopole and dipole)	~ 600
Beam pipe radius, mm	39
Cell radius, mm	113
Cell gap, mm	15
Waveguide, mm	122x110x25
Coupling slot, mm	51x4x3

Cold BPM for an ILC Cryomodule

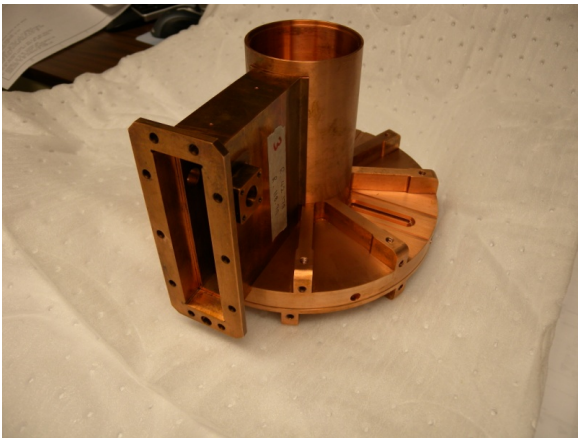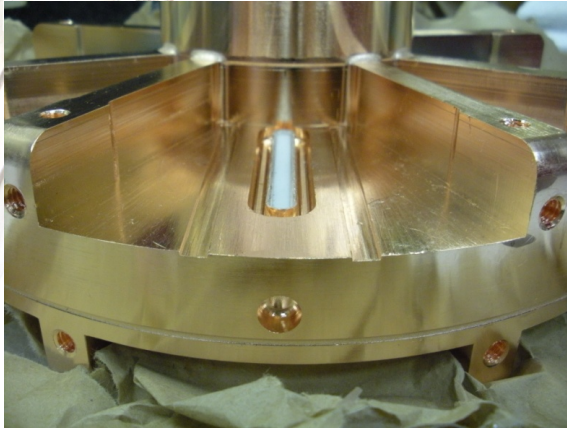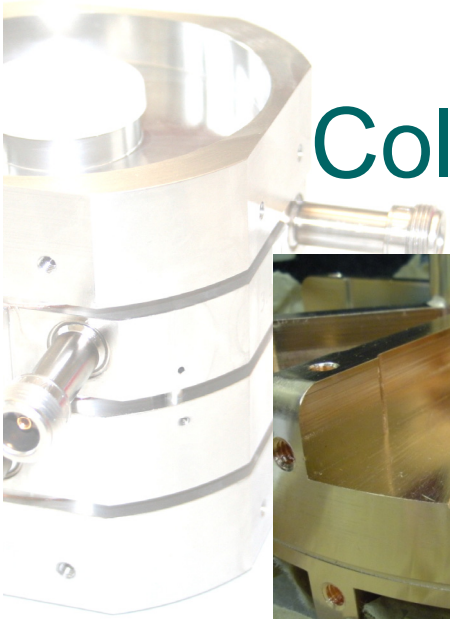

- Prototype status:
 - EM simulations & construction finalized
 - All parts are manufactured, brazing is underway
 - Prototype has “warm” dimensions
- Successful tests of the ceramic slot windows, i.e. several thermal cycles 300 K -> 77 K -> 300 K
- Next Steps:
 - Warm prototype finalization (brazing), RF measurements, tuning, beam tests (at the A0-Photoinjector).

Cavity BPM around the World

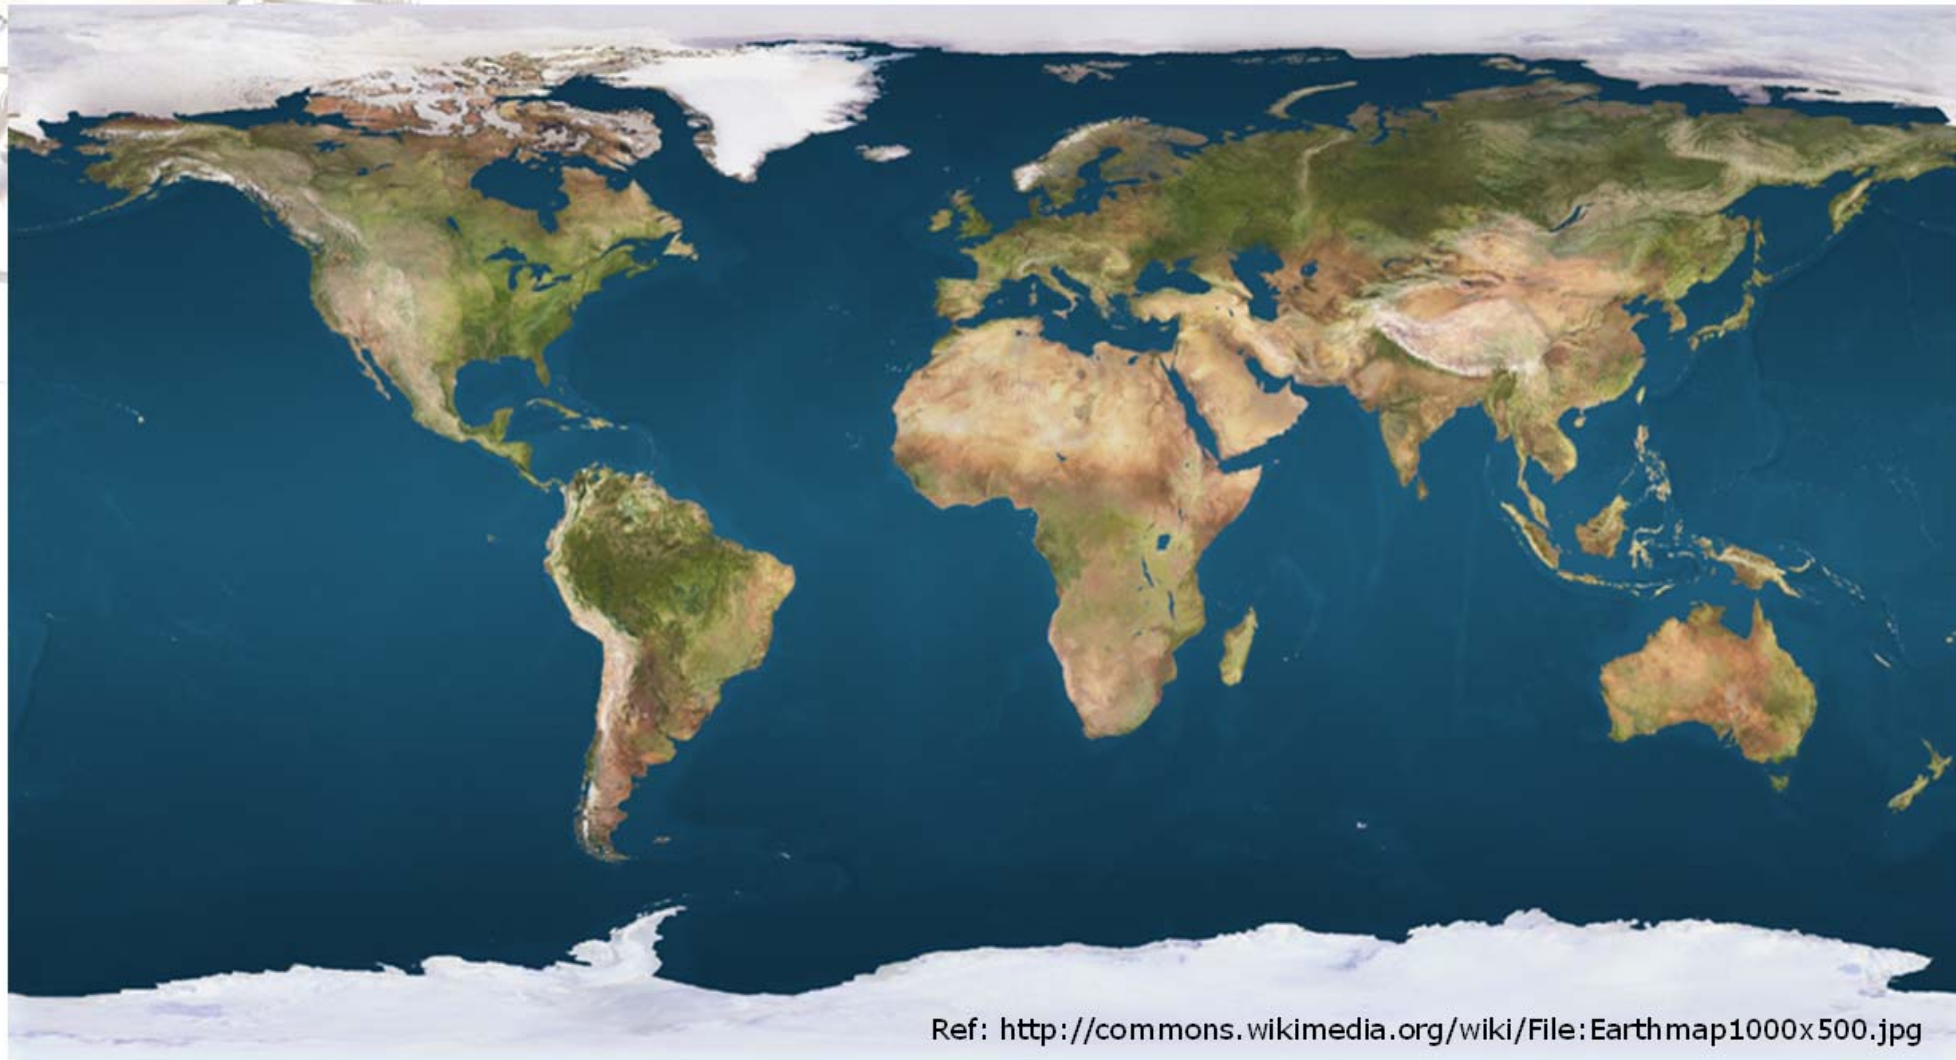

Ref: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>


Cavity BPM around the World

Cavity BPM from Argonne
for LCLS



LCLS

Stanford Linear Accelerator Center

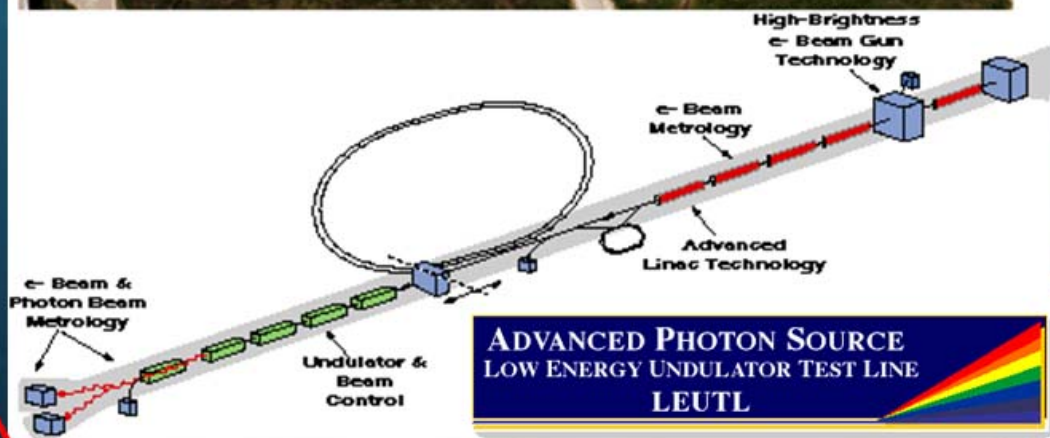


Ref: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>

Cavity BPM for LCLS

Requirement: $< 1\mu\text{m}$
for 0.2 – 1 nC





Test of 3 Cavity BPM at APS LEUTL

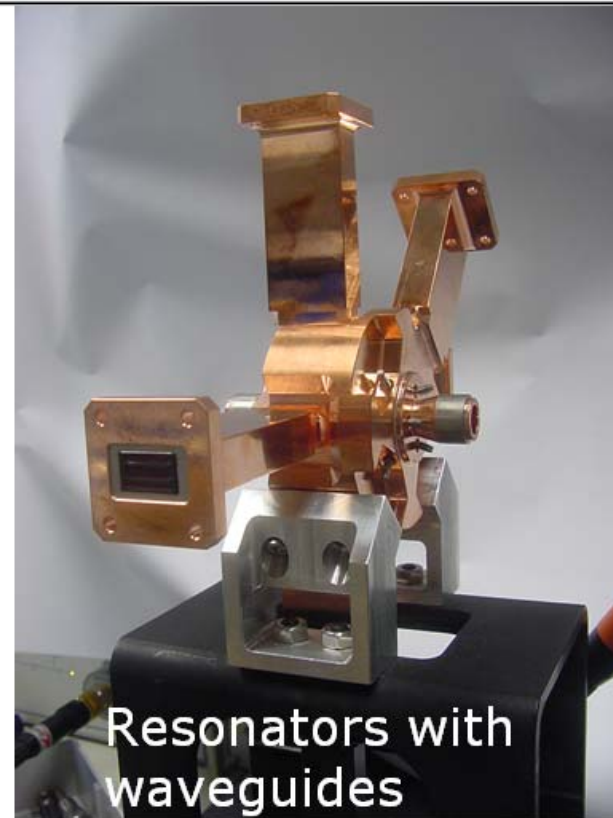

Resonators with
waveguides


BPM material: copper
Resonance frequency: 11.384 GHz
Loaded quality factor: 3550
Pipe diameter: 10 mm

Cavity BPM for LCLS: Electronics

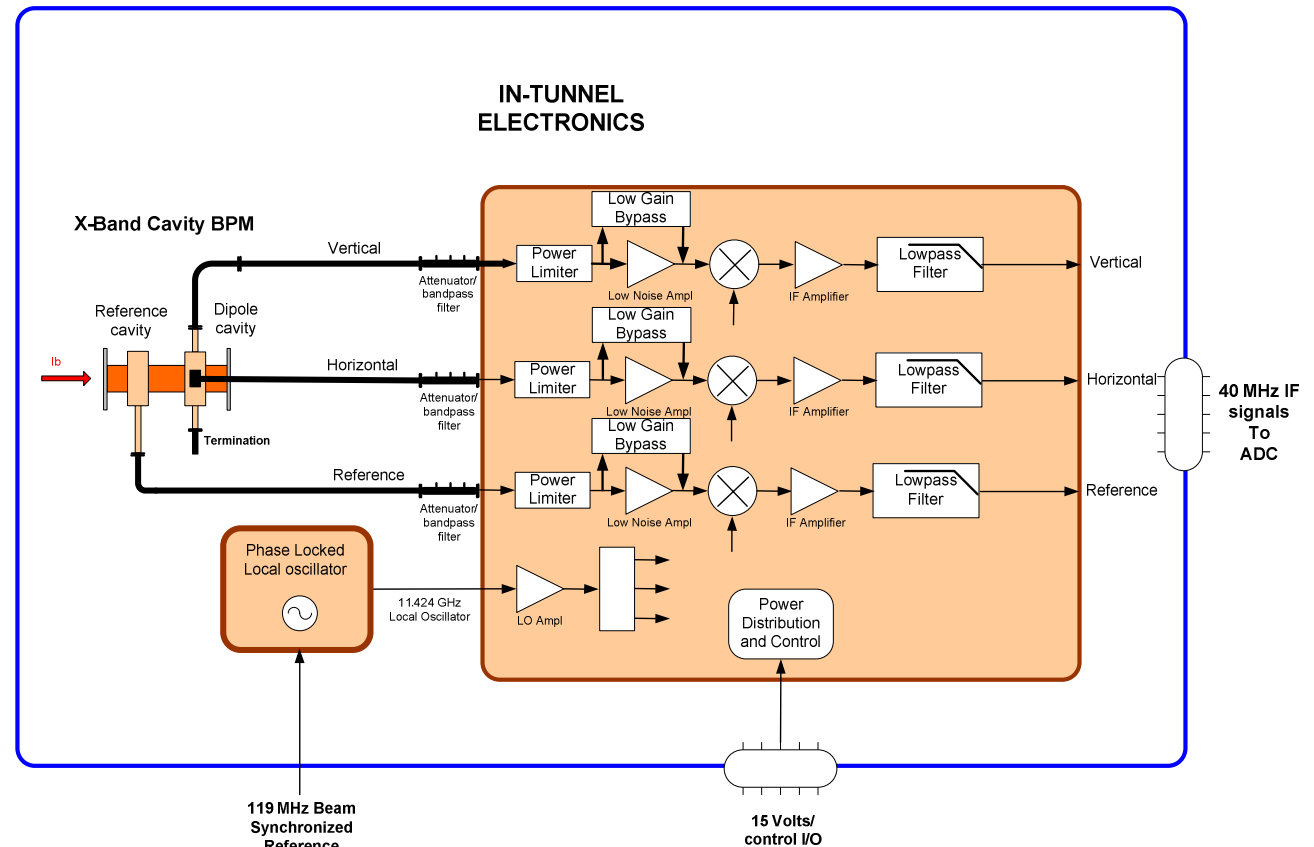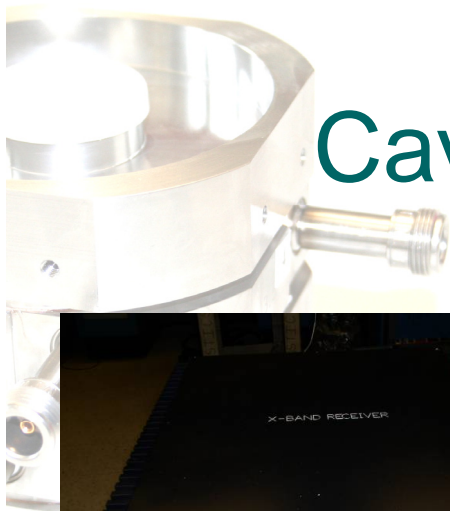

Waveguides connected to electronics board

Cavity BPM for LCLS: Results

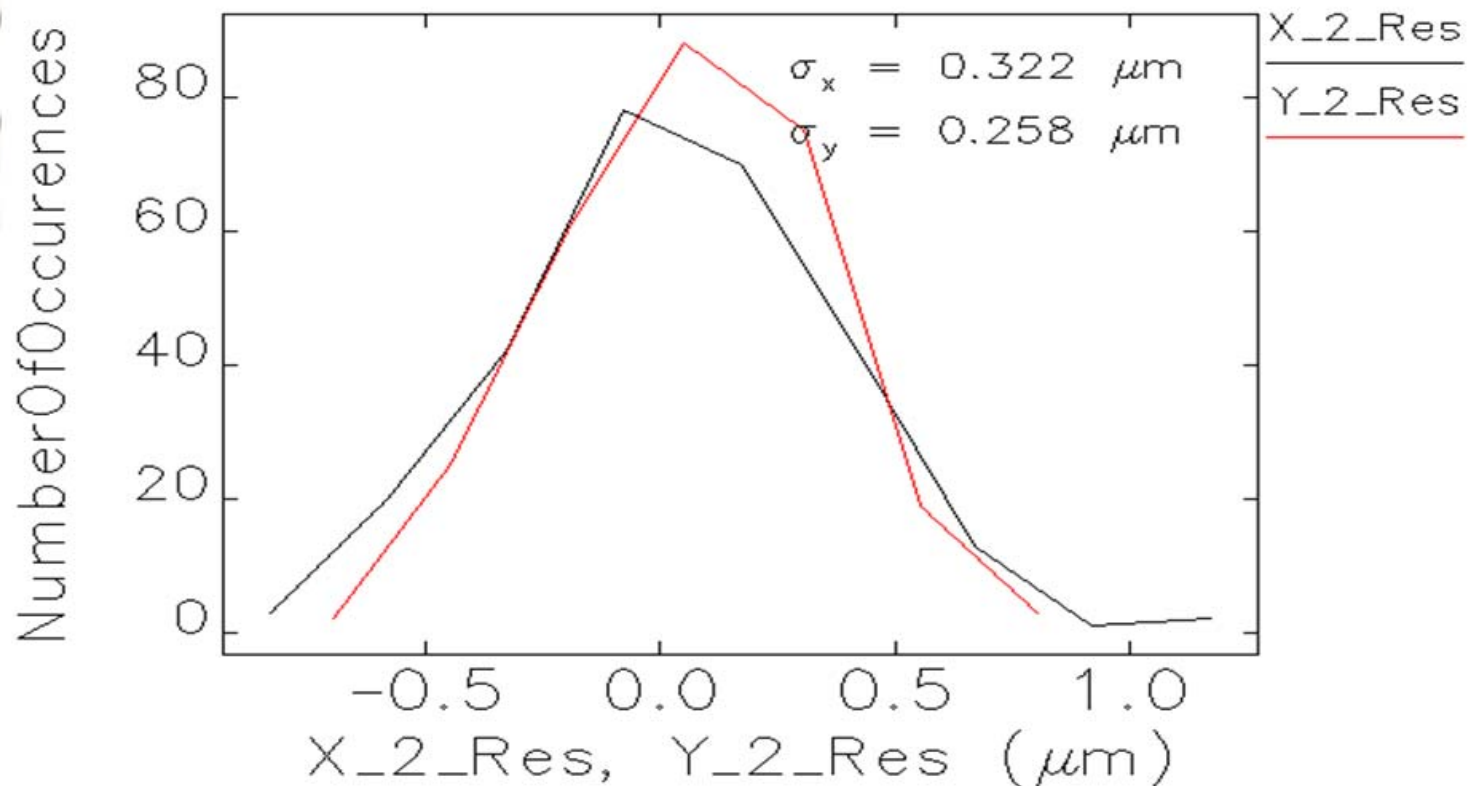



Beam Charge/pulse: 0.2 to 0.5 nC

Resolution below Requirement

Courtesy Nick Sereno



Cavity BPM for LCLS

Undulator System Layout

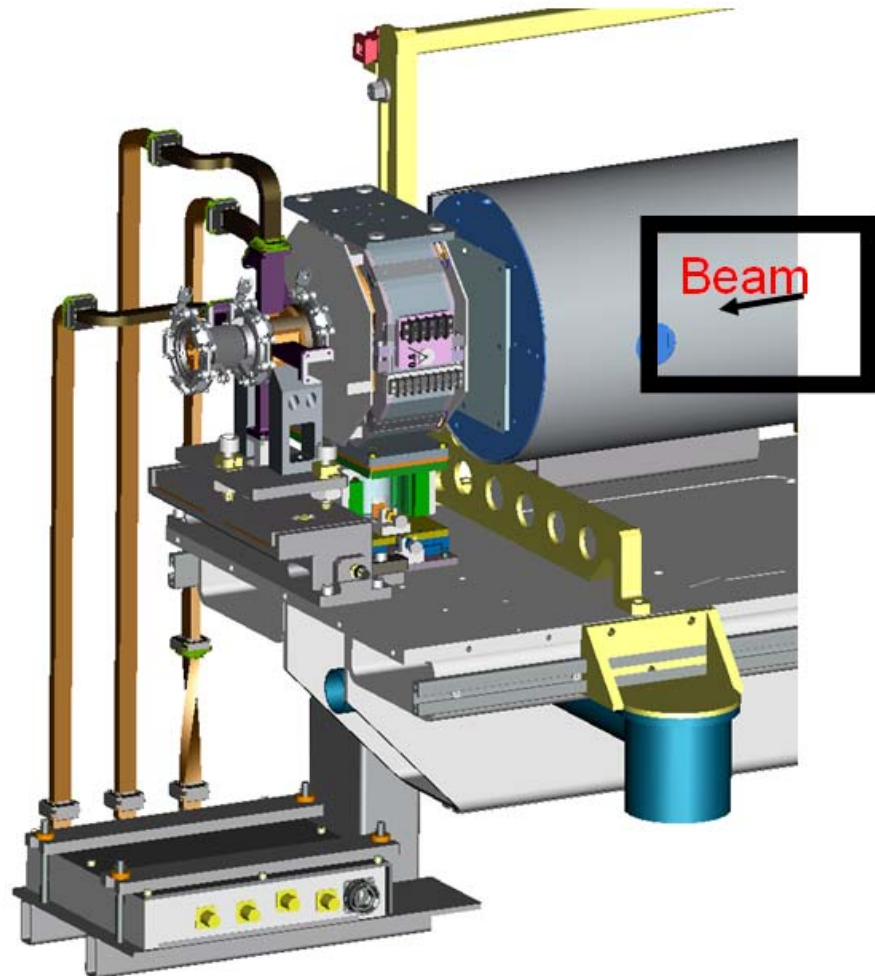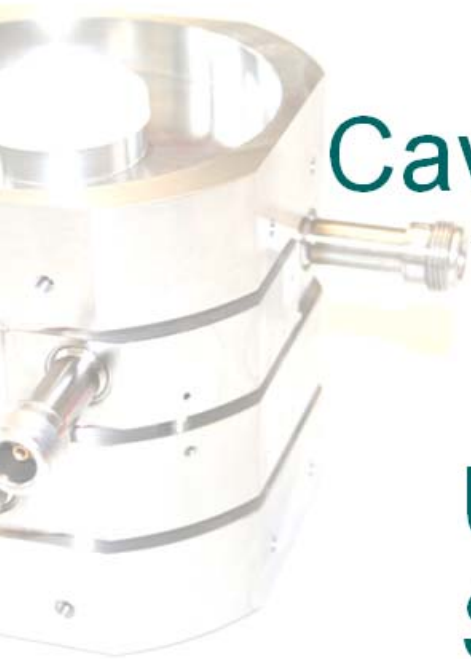

Cavity BPM at LCLS


Distribution of measured resolution:

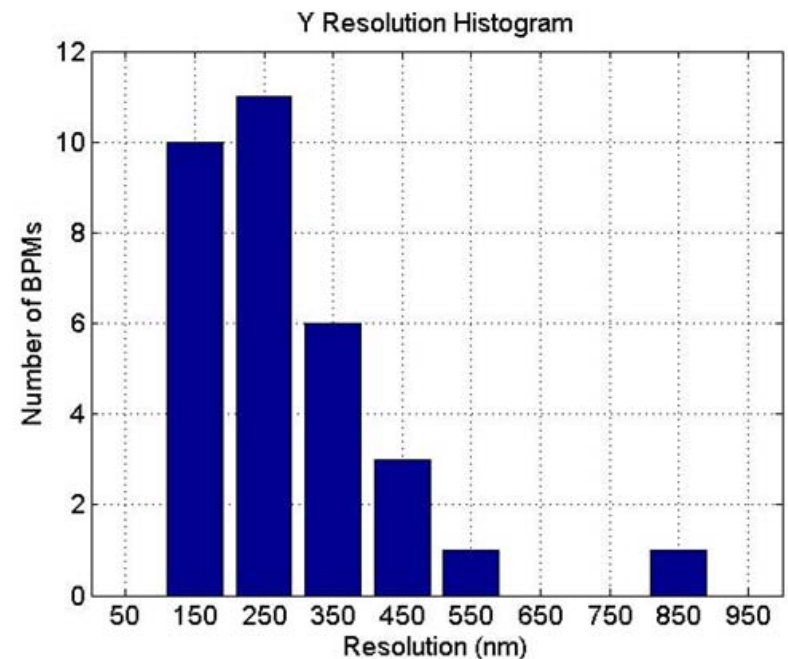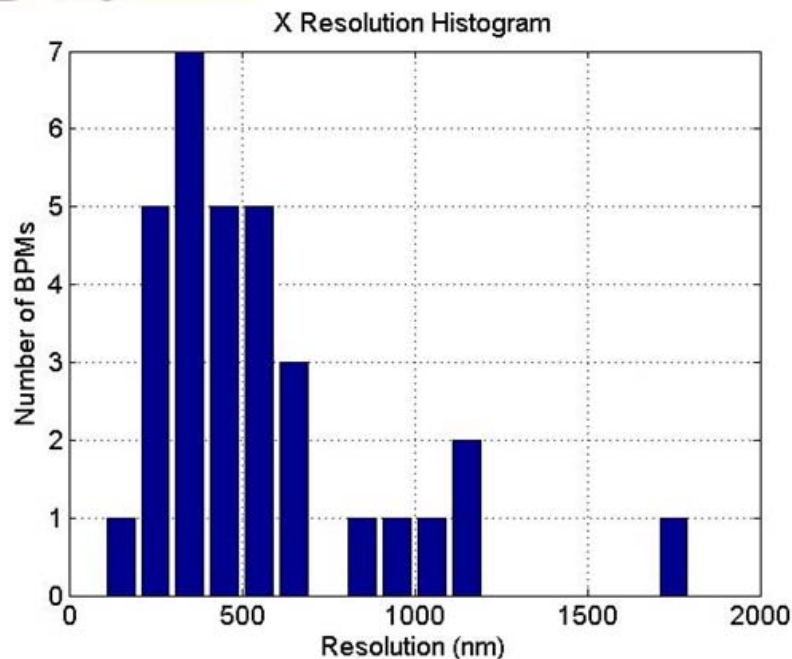


- Typical (median) resolutions:
 - $\sigma_x \sim 440$ nm with a few > 1 micron
 - $\sigma_y \sim 230$ nm, none > 1 micron
- Why the difference? Jitter? Energy variation?

See next talk TUOC03:
Stephen Smith 'LCLS
Cavity BPM'

Cavity BPM around the World

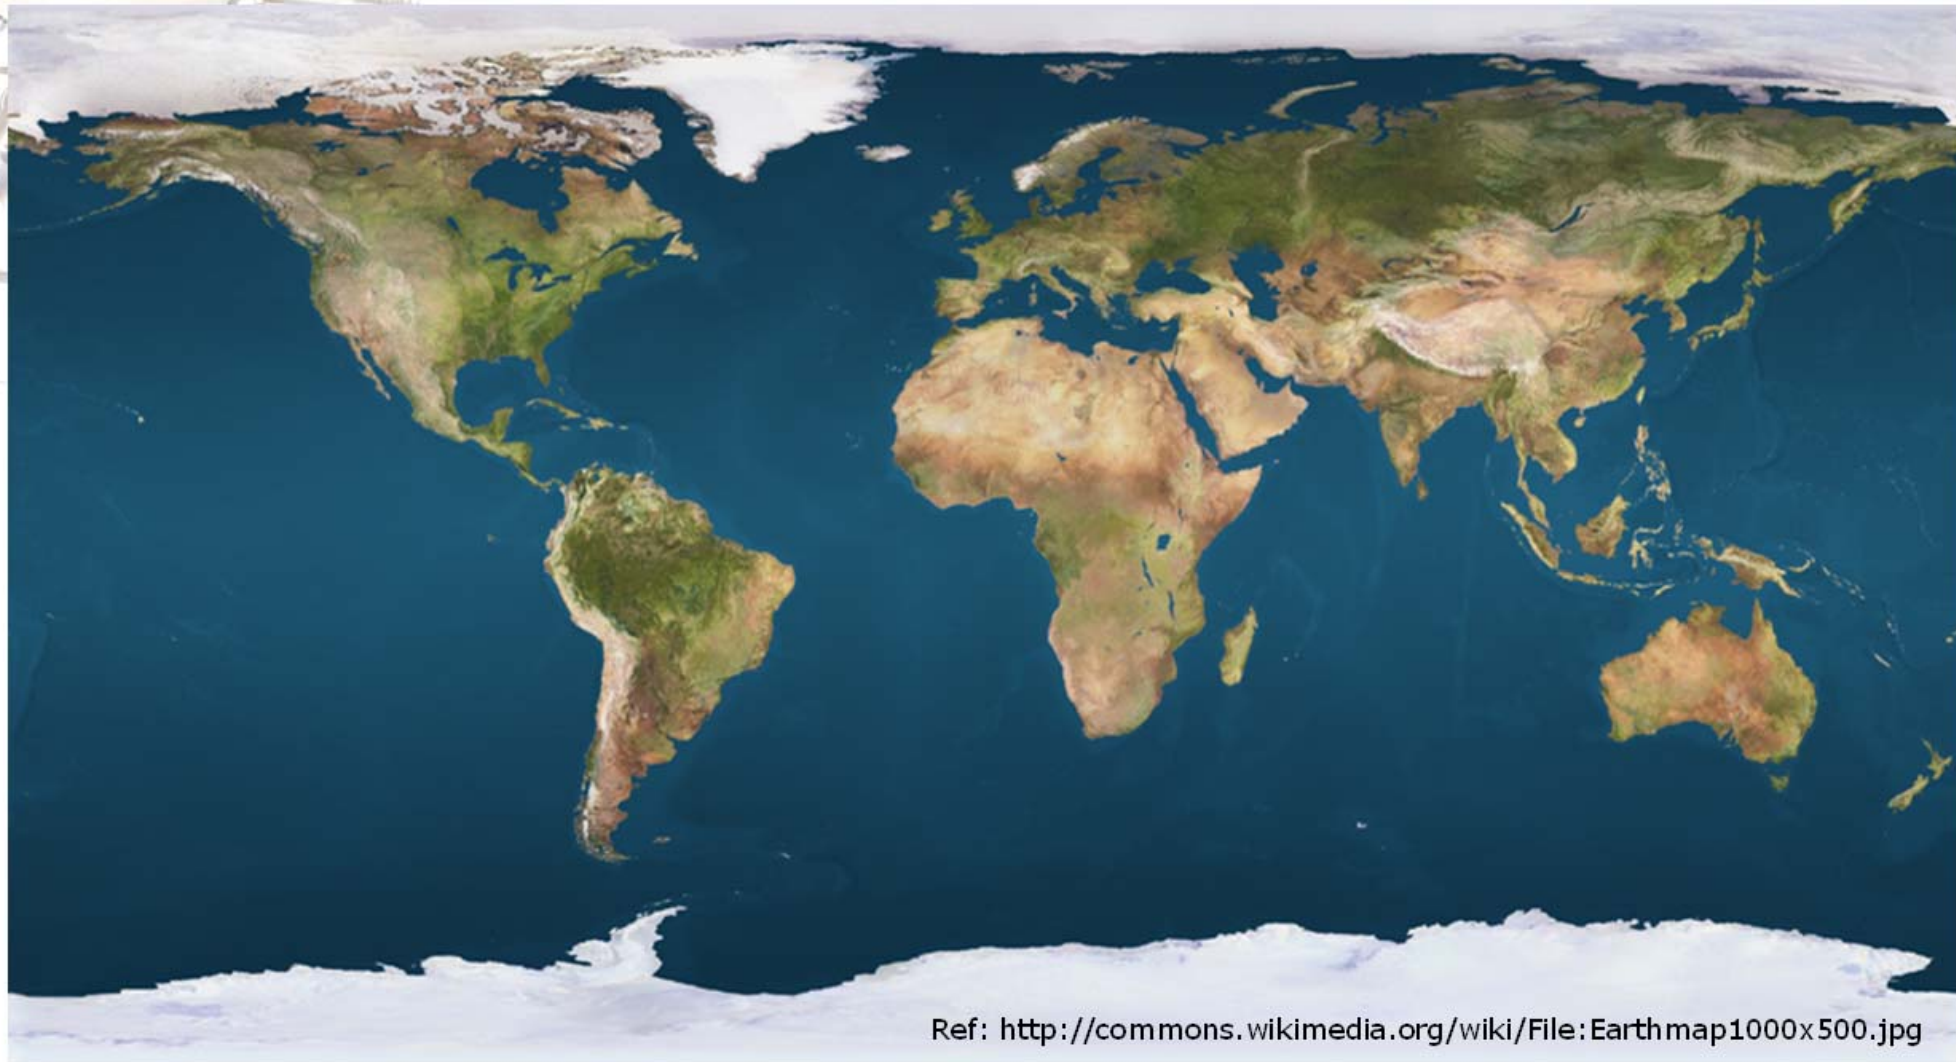


Cavity BPM around the World

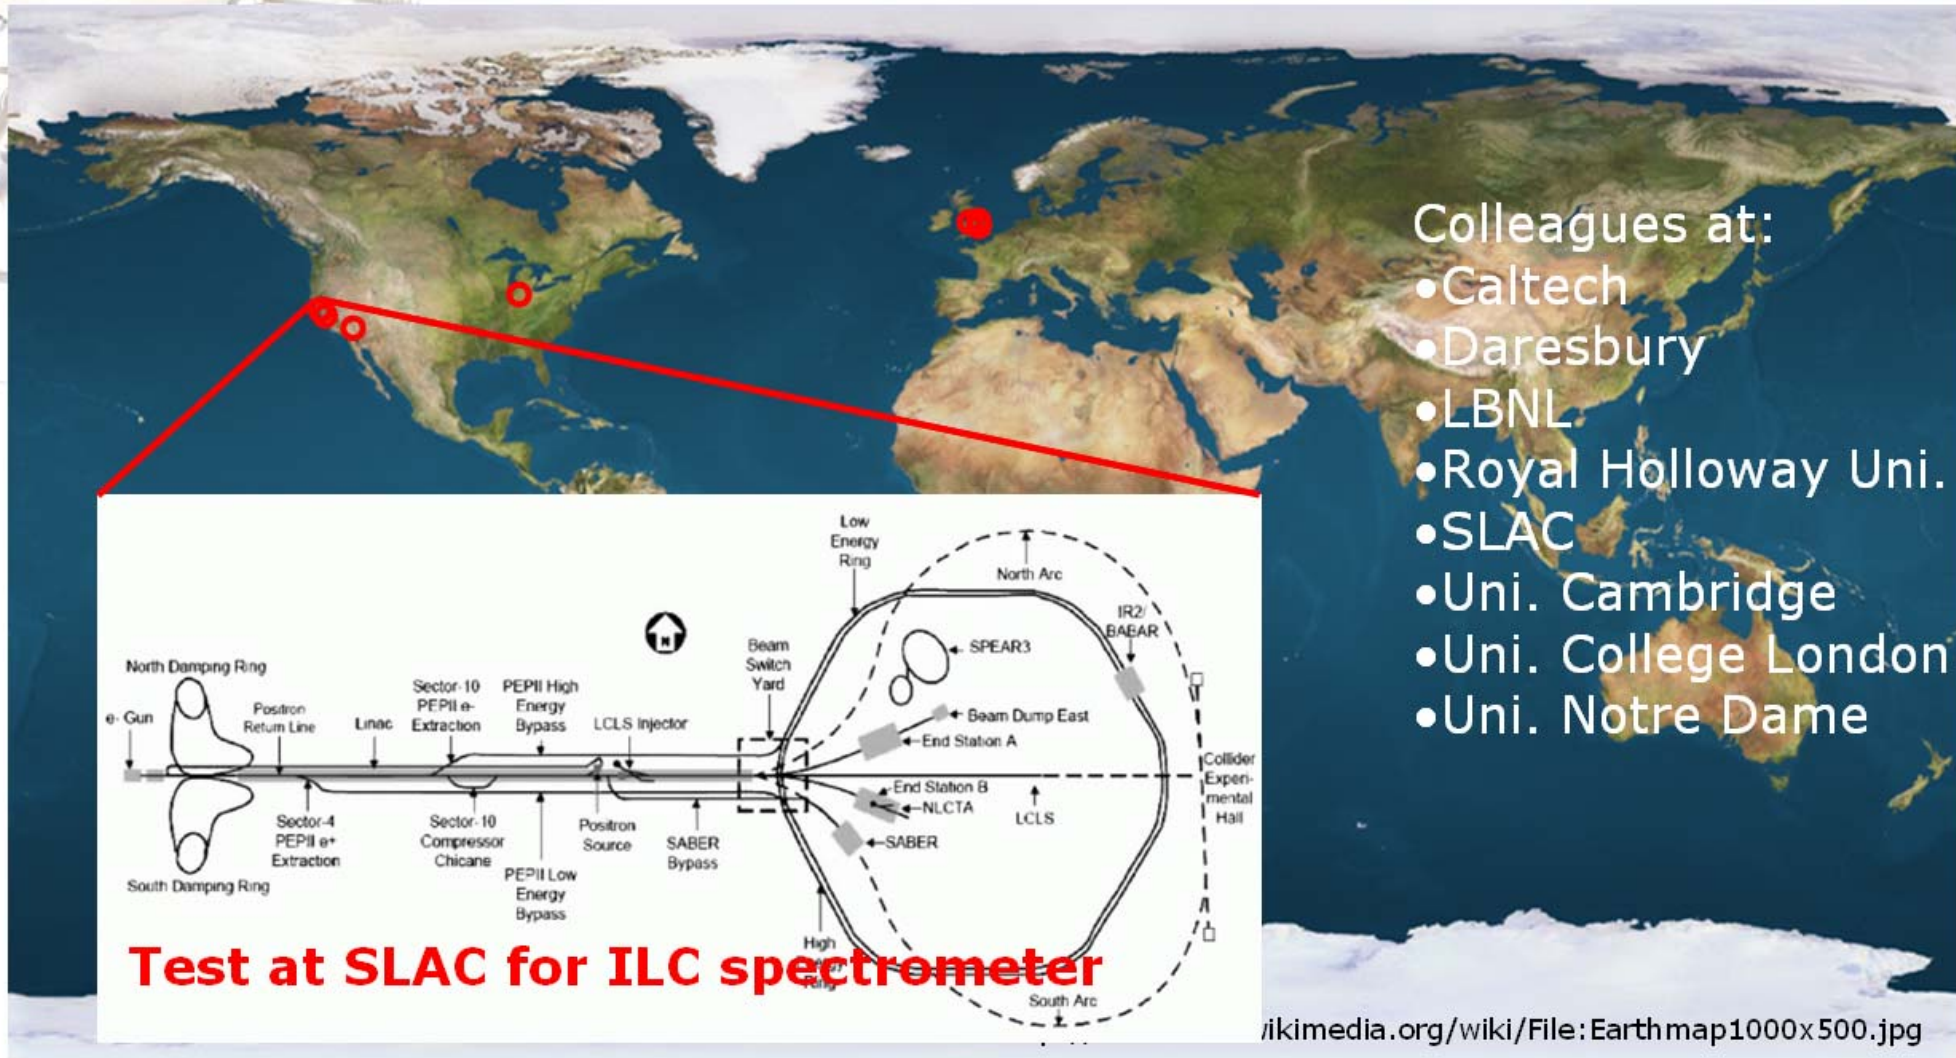

Cavity BPM for ILC spectrometer

Schematic of baseline design for the ILC spectrometer

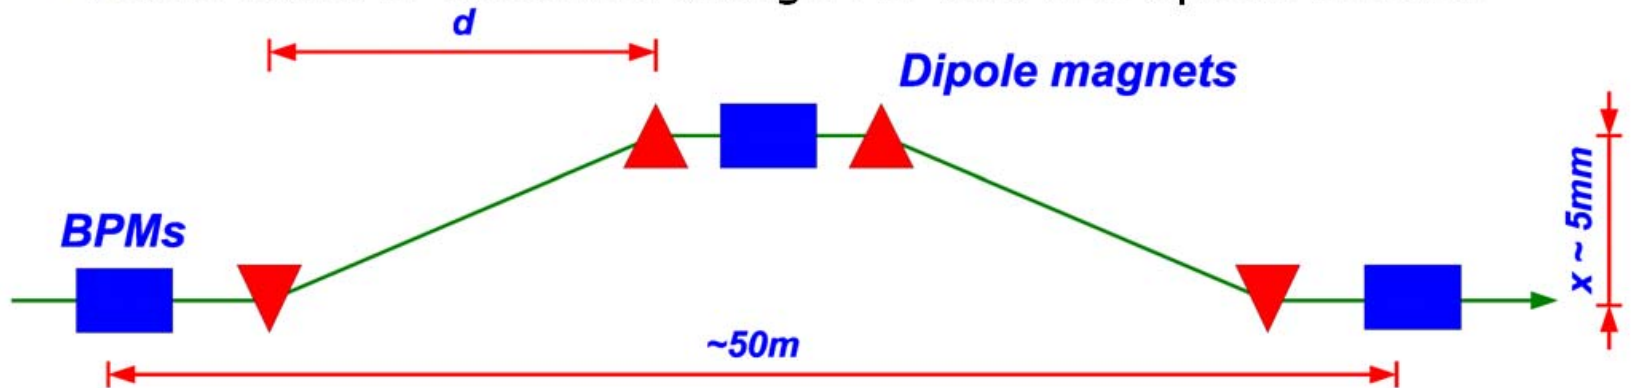

Required fractional energy measurement resolution: 10^{-4}


This results in a BPM resolution of < 500 nm

For better resolution the deflection can be smaller: smaller emittance growth

Cavity BPM for ILC spectrometer



Dipole cavity



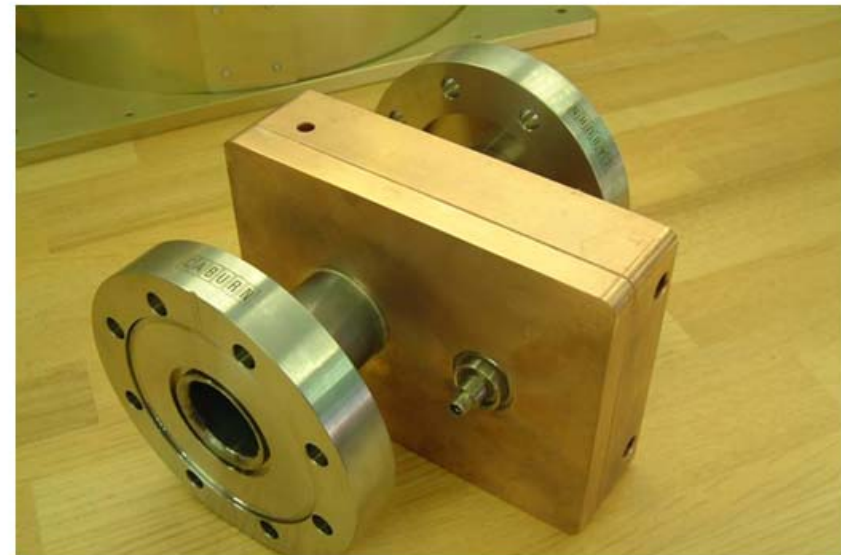


Reference cavity

BPM material: copper
Resonance frequency: 2.859 GHz
Loaded quality factor: ~ 500
Pipe diameter: 36 mm


Cavity BPM for ILC spectrometer

Measurement with 3 cylindrical Cavity BPM and monitoring vibrational motion

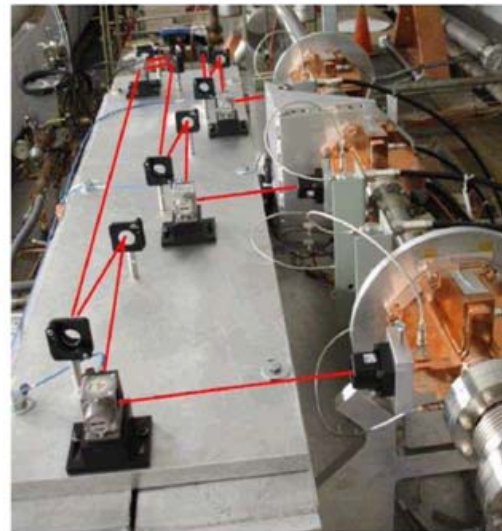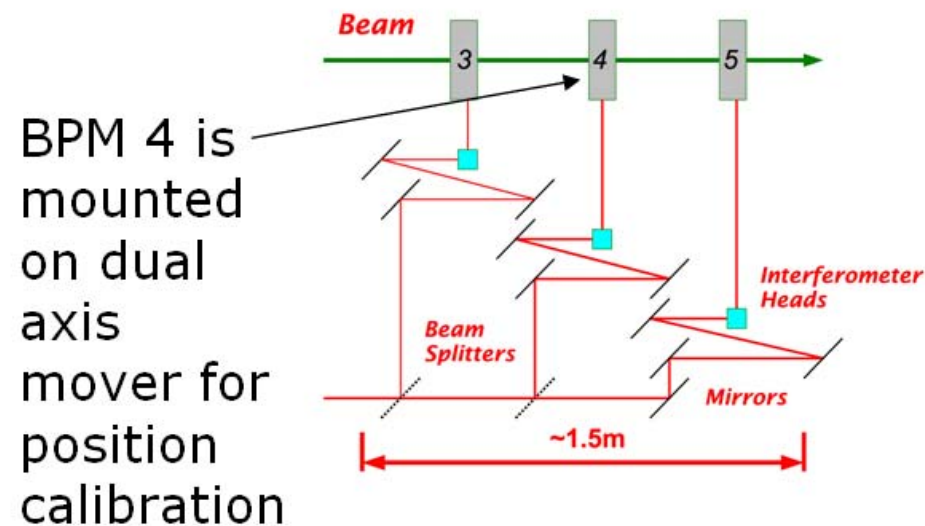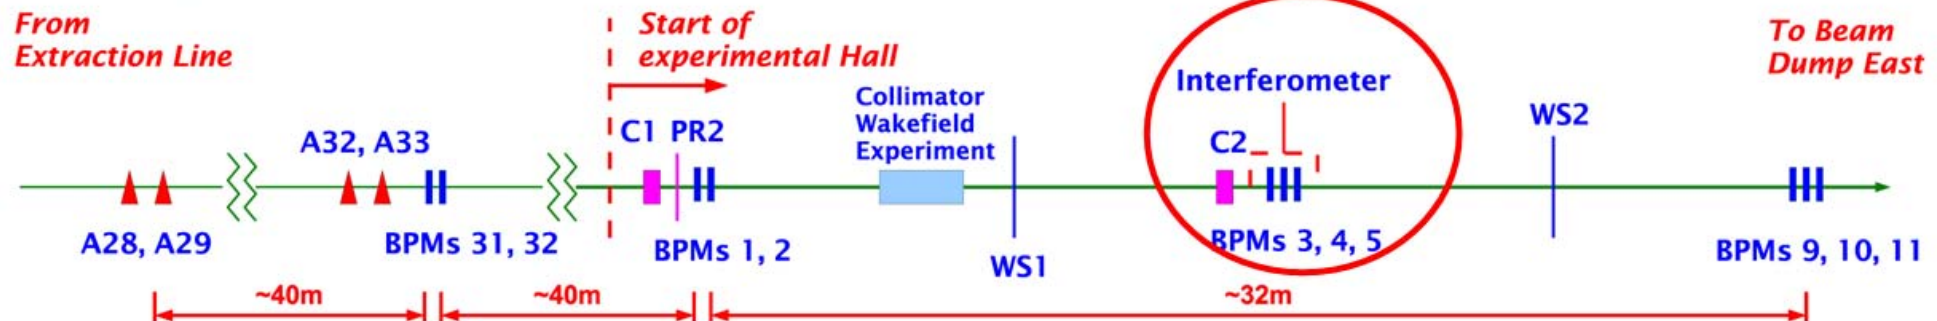

Includes horizontal rigid motion of entire system and non-rigid motion of each BPM with respect to each other

Cavity BPM for ILC spectrometer

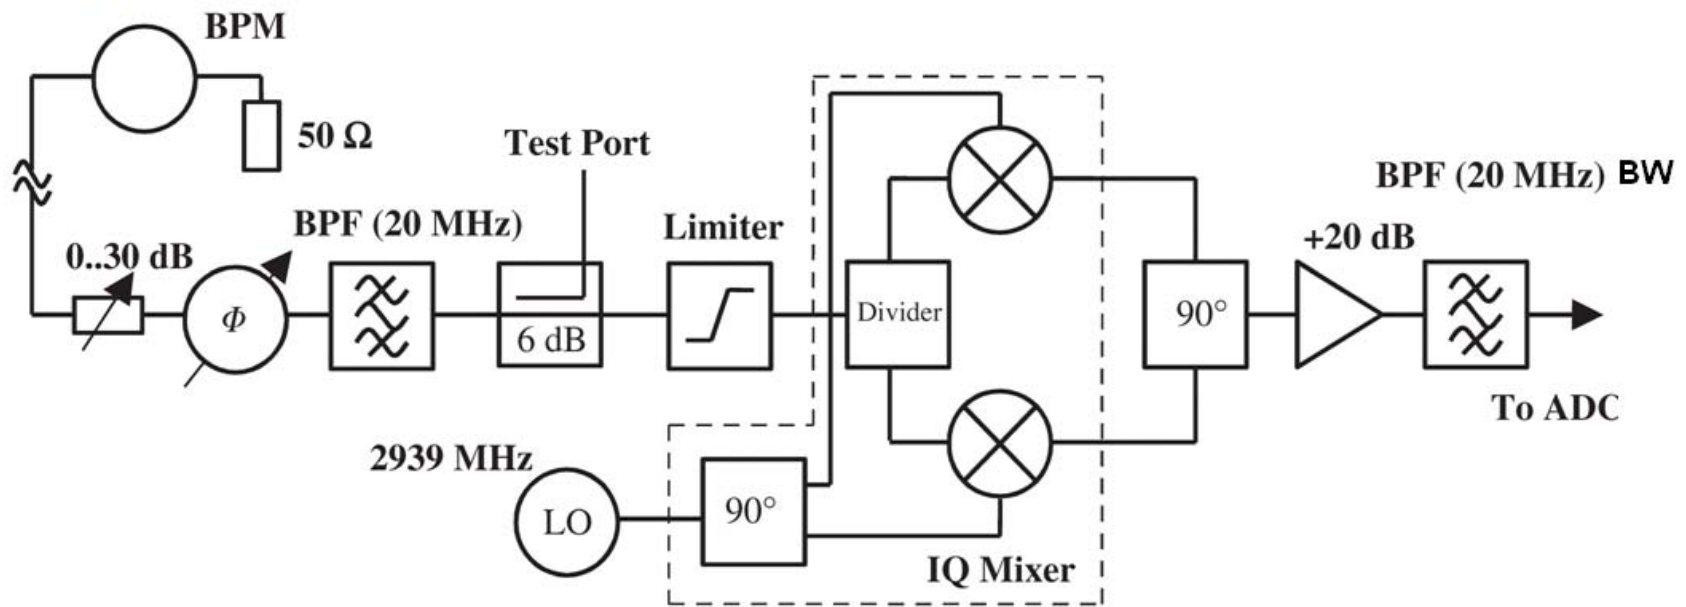

Here already an I-Q-Demodulation is applied



Cavity BPM for ILC spectrometer

Results

Resolution measured by taking into account that all 3 BPM are identical (charge about 2.6 nC):

$$\text{horizontal} = 0.53 \pm 0.05 \mu\text{m},$$

$$\text{vertical} = 0.46 \pm 0.02 \mu\text{m}$$

Vibrational motion:


BPM 3: Total = 170 nm, non-rigid motion = 94 nm

BPM 4: Total = 680 nm, non-rigid motion = 620 nm

BPM 5: Total = 130 nm, non-rigid motion = 72 nm

Latency between interferometer and BPM observed therefore vibrations can not be corrected completely, will be improved

Cavity BPM around the World

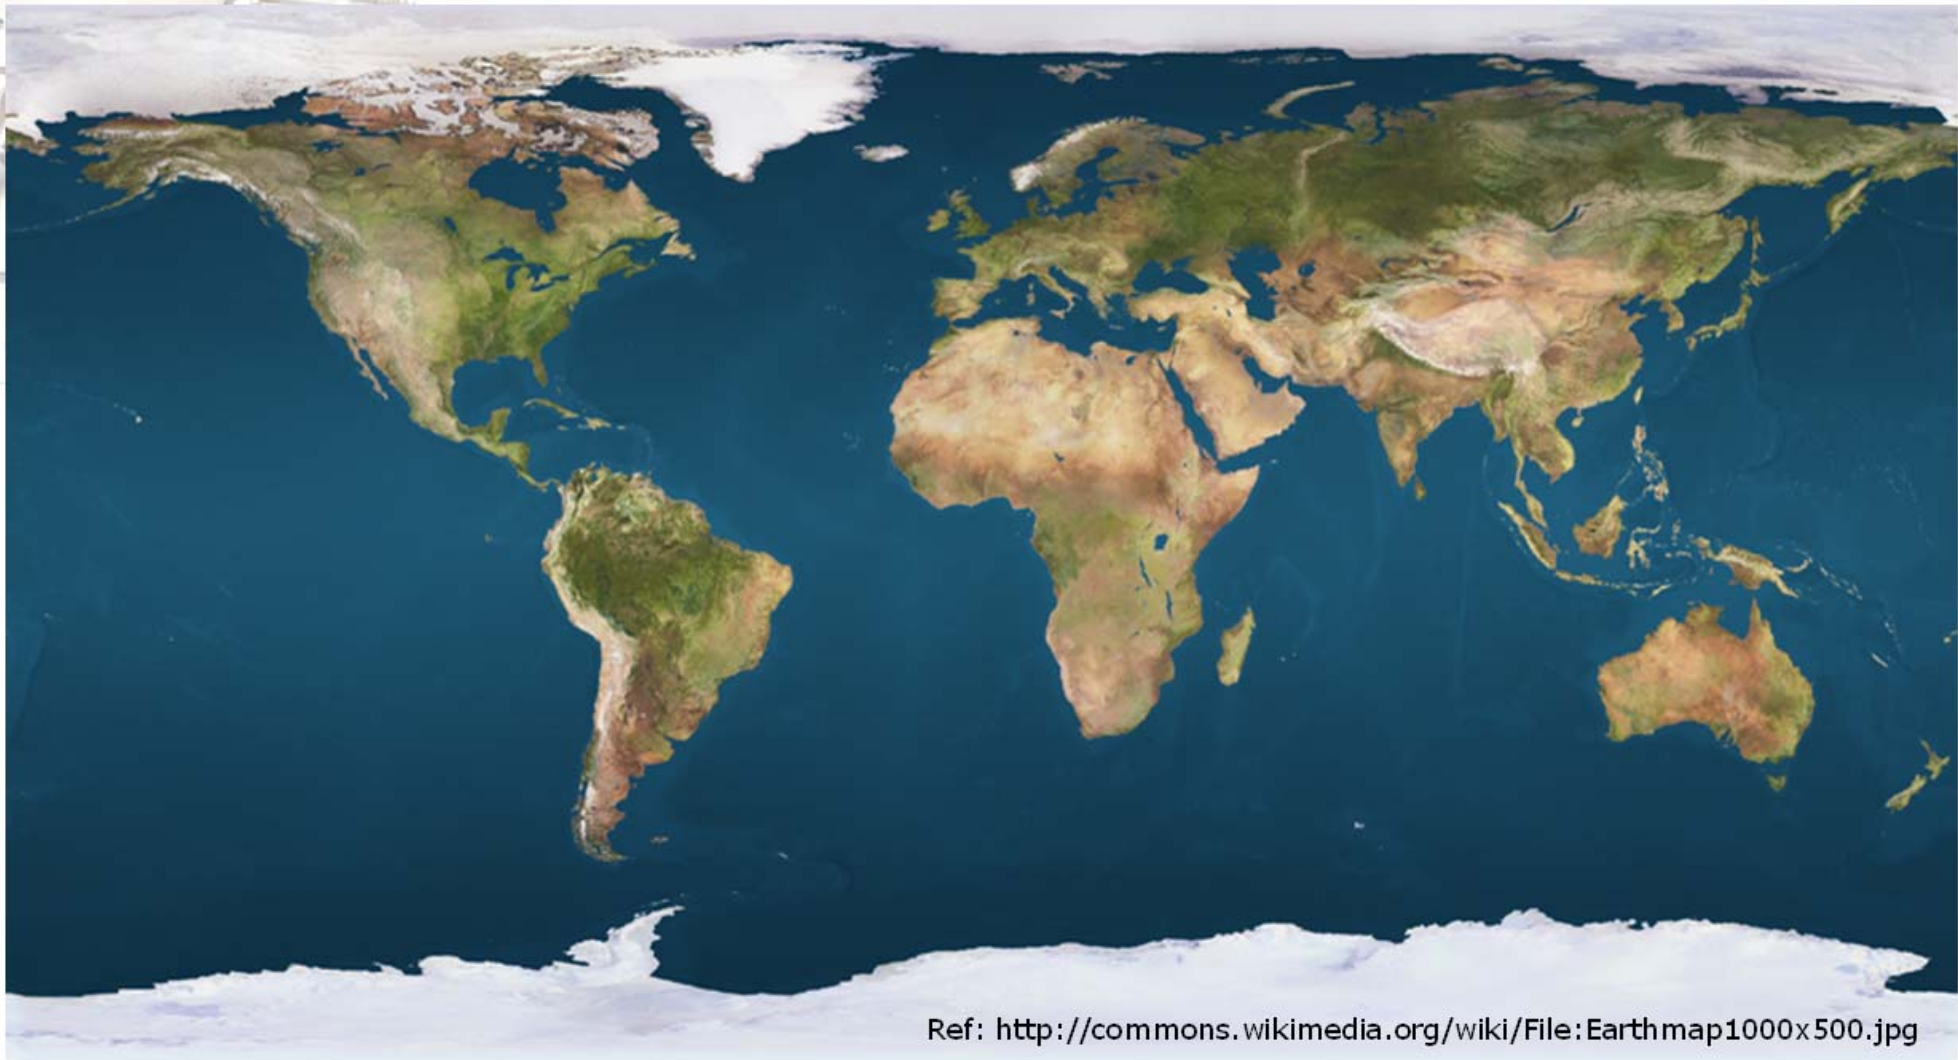


Ref: <http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>

Cavity BPM around the World

Cavity BPM for ILC Interaction Point (IP)



ATF2 LAYOUT

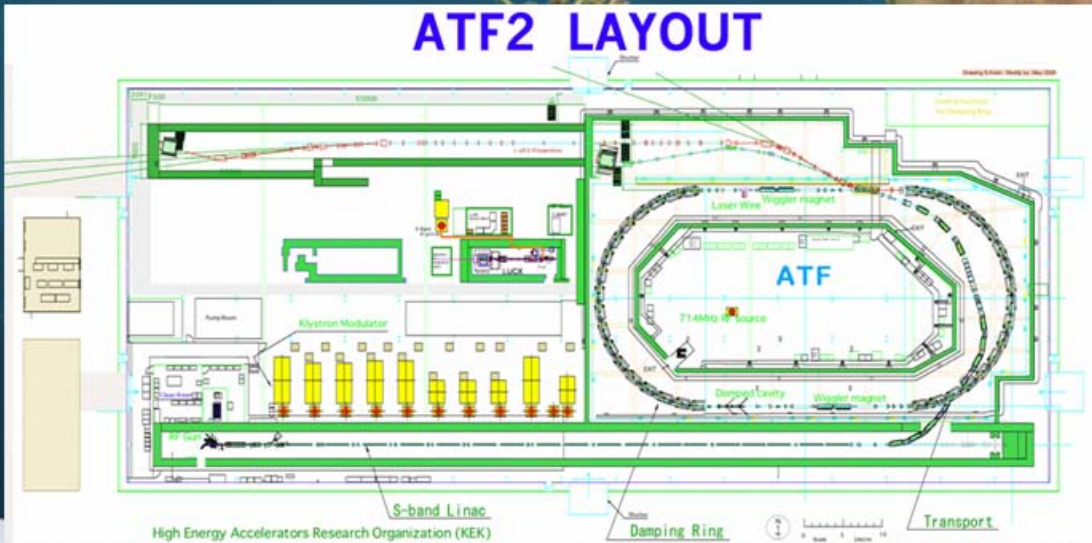

Colleagues at:
Caltech
Cornell Uni.
DESY
FNAL
KEK
LBNL
LLNL
Royal Holloway Uni.
SLAC
Uni. Cambridge
Uni. College London

<http://commons.wikimedia.org/wiki/File:Earthmap1000x500.jpg>

Cavity BPM for ILC IP

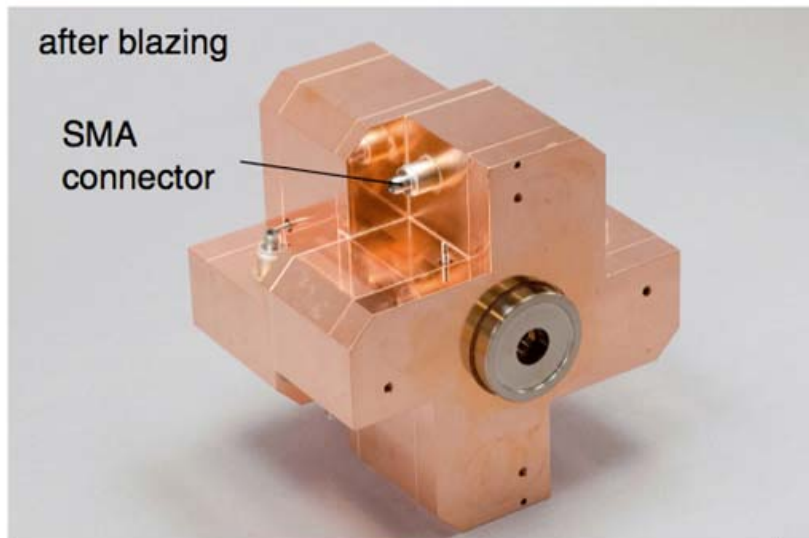
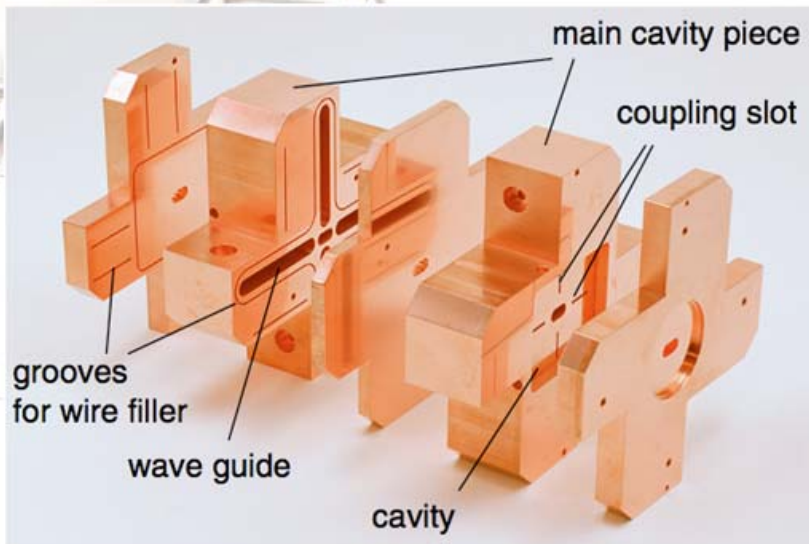


- Special BPM to monitor beam stability at the virtual IP of ATF2 final focus test line. Required resolution: 2nm
- Design points
 - minimize X-Y contamination by a rectangular cavity design.
 - suppress beam angle effect (special need for the strong focus optics) by a thin cavity gap.
- bench test result
 - X-port
 - f: 5707.4MHz, Q_L : 2182
 - Y-port
 - f: 6420.8MHz, Q_L : 1308
 - Pipe shape: 6 and 12 mm aperture

Mounted in beamline without mover on heavy granit table (Δt limit variation 10 mK)




Cavity BPM for ILC IP

Electronics

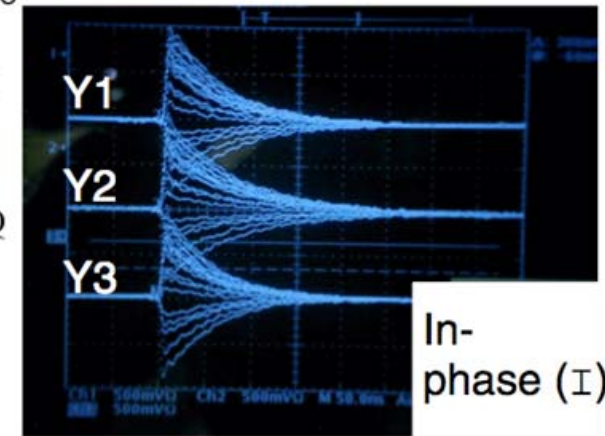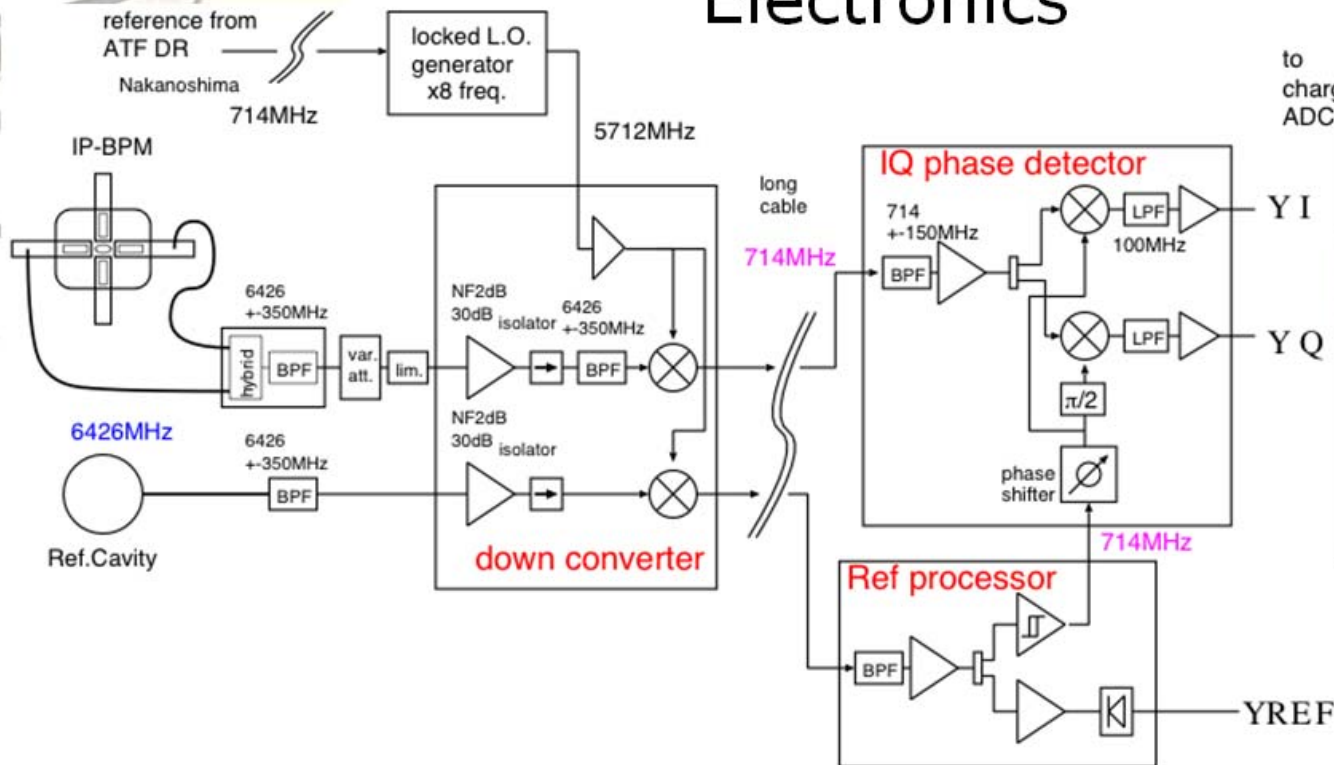

- detection BW: 20MHz (gate width 50nsec)
- noise limit: -95dBm at input of down-converter
- expected signal: -97dBm (1nm position, 1.6nC/bunch)

Cavity BPM for ILC IP

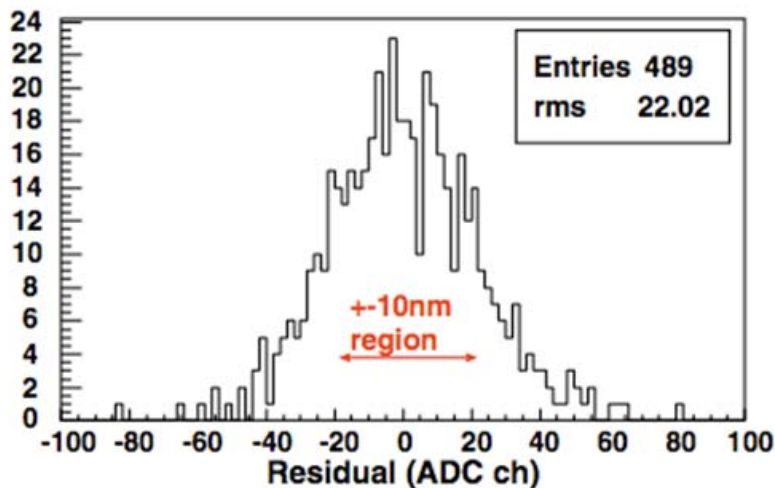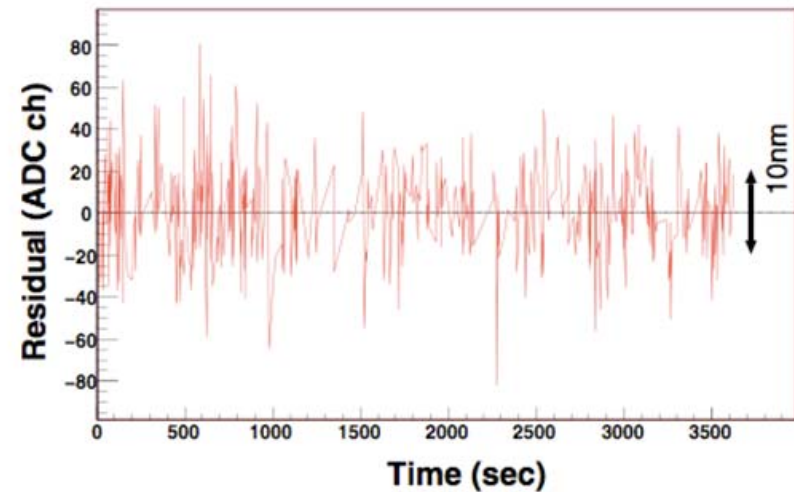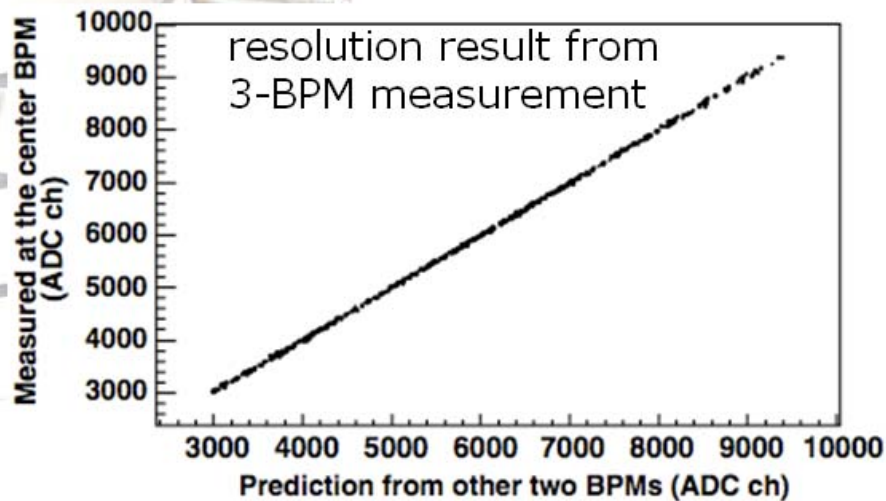

Measured resolution:
 $8.72 \pm 0.28(\text{stat.}) \pm 0.35(\text{sys}) \text{ nm}$
 (at $0.68 \times 10^{10} \text{ e/bunch}$)
 intrinsic noise of the system was
 estimated to be 3.8nm
 (unknown resolution source: 7.9nm)



Summary

- Influence of monopole mode decreased due to wave guide
- Influence of beam angle and bunch tilt filtered with I-Q demodulator
- Resolution depends on effort for mechanical production, electronics and non-rigid motion compensation
- Best resolution so far 8.72 nm at KEK